

ALISTA-C




QUALITY. GUARANTEED.



FLOOR Sleek 60x60cm
WALL Sleek 30x60cm

PORCELAIN

Designed for the minimalist who would like to infuse a touch of nature into their surroundings, ALISTA-C by MML® adds a contemporary touch to meet the needs of the modern minimalist. This travertine design comes in a matt finish with 4 colour options – Sleek (Bone), Style (Cream), Glamour (Dark Grey), Charm (Taupe).

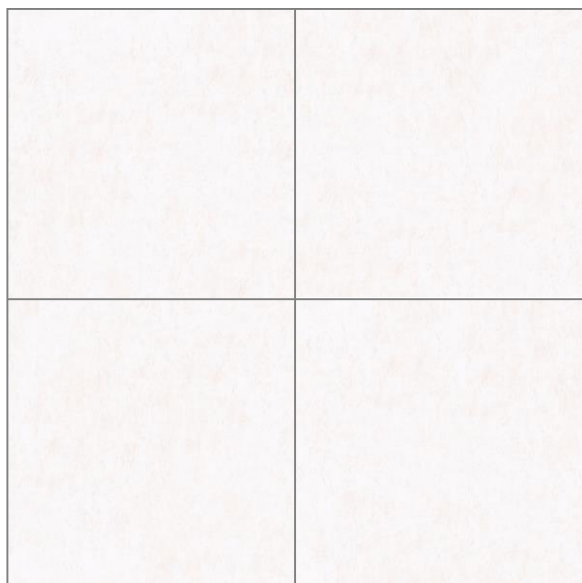

SLEEK

MATT SM8A6D



60x60cm




30x60cm




30x30cm


RESTYLE



Horizontal Cut



Diagonal Cut



Diagonal Groove



Floor



Indoor




Wall




Outdoor

V2
Random
Eco MML

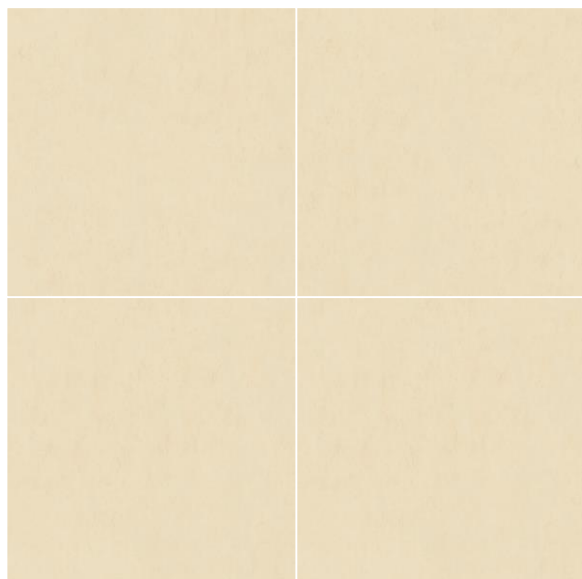


STYLE

MATT SM8A7D



60x60cm




30x60cm



30x30cm


RESTYLE



Horizontal Cut



Diagonal Cut



Diagonal Groove



Floor



Indoor




Wall



Outdoor

V2
Random
Eco MML

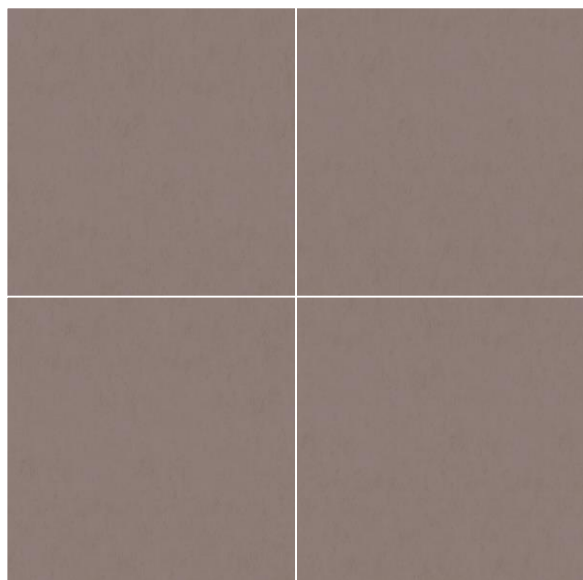

CHARM

MATT SM8A8D



60x60cm



30x60cm



30x30cm


RESTYLE



Horizontal Cut



Diagonal Cut



Diagonal Groove



Floor



Indoor




Wall



Outdoor

V2
Random
Eco MML

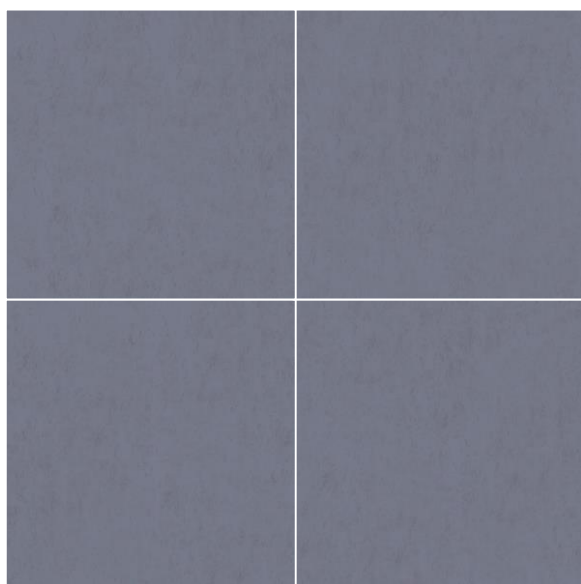


GLAMOUR

MATT SM8A9D



60x60cm




30x60cm



30x30cm


RESTYLE



Horizontal Cut



Diagonal Cut



Diagonal Groove



Floor



Indoor



Wall



Outdoor

V2
Random
Eco MML

PACKING LIST

SIZE	FINISH	THICKNESS (mm)	PCS / M2	PCS / CTN	CTN / PLT	PLT / 20'FCL	AVG WEIGHT / CTN (KG)	AVG WEIGHT / PLT (KG)
30x30cm	Matt	7.7	11.11	16	42	20	23.84	1,026
30x60cm	Matt	8.7	5.55	8	40	18	27.76	1,135
60x60cm	Matt	9.7	2.78	4	32	20	31.36	1,029

TECHNICAL SPECIFICATION

MML PORCELAIN E ≤ 0.5% (B1a, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2 / EN 98	±0.60% max±2.0mm	±0.25% max±2.0mm
Thickness	ISO 10545-2 / EN 98	±5.00% max±0.5mm	±5.00% max±0.5mm
Straightness of Sides	ISO 10545-2 / EN 98	±0.50% max±1.5mm	±0.25% max±1.5mm
Rectangularity	ISO 10545-2 / EN 98	±0.50% max±2.0mm	±0.30% max±2.0mm
Surface Flatness	ISO 10545-2 / EN 98	±0.50% max±2.0mm	±0.25% max±2.0mm
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13 / EN 106	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3 / EN 99	Group B1a, E≤0.5%	≤0.5%
Breaking Strength	ISO 10545-4 / EN 100	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4 / EN 100	Min 35 N / mm ²	> 35 N / mm ² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7 / EN 154	Report Abrasion Class	Glazed: Class 2 – 4 (Depending on Glaze Type)
Resistance to Deep Abrasion	ISO 10545-6 / EN 102	Max 175mm ³	Unglazed: Max 150mm ³