

BELLUCI




QUALITY. GUARANTEED.



FLOOR Brown 60x60cm
WALL Decor 30x30cm

PORCELAIN

Add a touch of industrial chic to your interior spaces with the stylish concrete look of BELLUCI by MML®. In raw shades of white, brown and greys, this fresh concrete design comes in a matt finish.

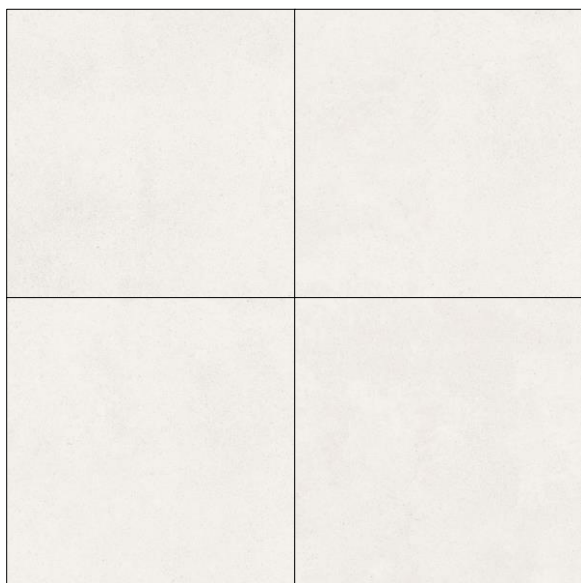

WHITE

MATT SM8K1D



60x60cm



30x60cm

BELLUCI DECOR



BLUCI1



Floor



Indoor



Wall



Outdoor

V2
Random
Rectified
Eco MML



BROWN

MATT SM8K2D




60x60cm



30x60cm

BELLUCI DECOR



BLUCI2



Floor



Indoor



Wall



Outdoor

V2
Random
Rectified
Eco MML



LIGHT GREY

MATT SM8K3D



60x60cm



30x60cm

BELLUCI DECOR



BLUCI3



Floor



Indoor




Wall



Outdoor

V2
Random
Rectified
Eco MML

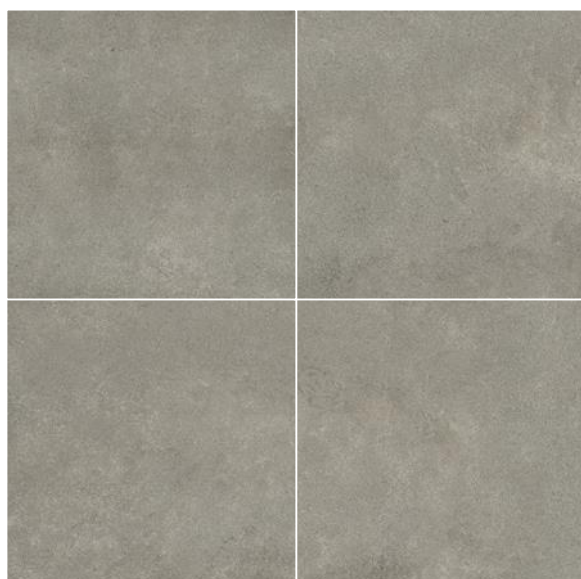

GREY

MATT SM8K4D



60x60cm



30x60cm

BELLUCI DECOR



BLUCI4



Floor



Indoor



Wall



Outdoor

V2
Random
Rectified
Eco MML



DARK GREY

MATT SM8K5D




60x60cm



30x60cm

BELLUCI DECOR



BLUCI5



Floor



Indoor



Wall



Outdoor

V2
Random
Rectified
Eco MML

PACKING LIST

SIZE	FINISH	THICKNESS (mm)	PCS / M2	PCS / CTN	CTN / PLT	PLT / 20'FCL	AVG WEIGHT / CTN (KG)	AVG WEIGHT / PLT (KG)
30x60cm	Matt	8.7	5.55	8	40	18	27.76	1,135
60x60cm	Matt	9.7	2.78	4	32	20	31.36	1,029

TECHNICAL SPECIFICATION

MML PORCELAIN E ≤ 0.5% (B1a, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2 / EN 98	±0.60% max±2.0mm	±0.25% max±2.0mm
Thickness	ISO 10545-2 / EN 98	±5.00% max±0.5mm	±5.00% max±0.5mm
Straightness of Sides	ISO 10545-2 / EN 98	±0.50% max±1.5mm	±0.25% max±1.5mm
Rectangularity	ISO 10545-2 / EN 98	±0.50% max±2.0mm	±0.30% max±2.0mm
Surface Flatness	ISO 10545-2 / EN 98	±0.50% max±2.0mm	±0.25% max±2.0mm
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13 / EN 106	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3 / EN 99	Group B1a, E≤0.5%	≤0.5%
Breaking Strength	ISO 10545-4 / EN 100	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4 / EN 100	Min 35 N / mm ²	> 35 N / mm ² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7 / EN 154	Report Abrasion Class	Glazed: Class 2 – 4 (Depending on Glaze Type)
Resistance to Deep Abrasion	ISO 10545-6 / EN 102	Max 175mm ³	Unglazed: Max 150mm ³