

KURO



QUALITY. GUARANTEED.



WALL Lappato 60x60cm
FLOOR Rough 60x120cm
COUNTER Polished 60x120cm

PORCELAIN

Not all black tiles are made equal. The super black and sleek KURO by MML® is designed to add vogue to distinguish the most stylish of stylish spaces. This full body porcelain tile is available in options of polished, lappato, matt and rough finishes to add a tasteful touch to your indoor and outdoor spaces.




BLACK


POLISHED PC200



80x80cm



60x120cm



60x60cm

KURO & SHIRO DECOR



Floor




Indoor



Wall

V1

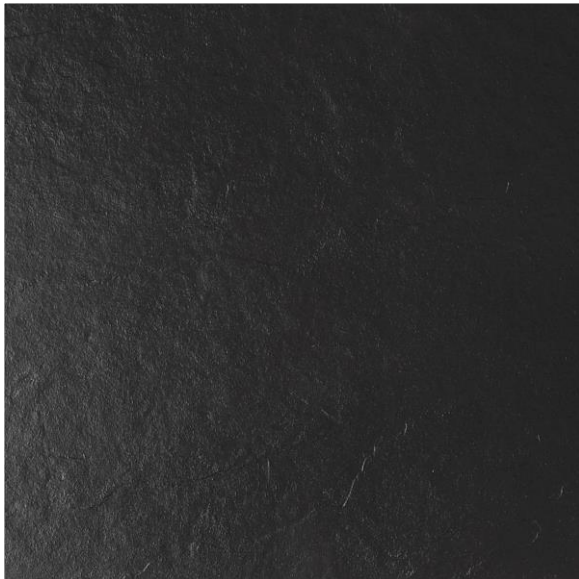

BLACK

ROUGH RC201



60x120cm



Floor



Indoor




Wall




Outdoor

V1

Structured Body

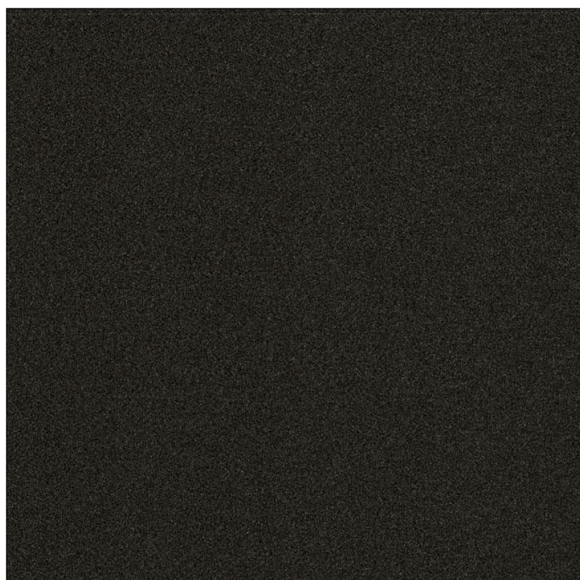


BLACK
MATT SC201



80x80cm



60x120cm



60x60cm



Floor



Indoor




Wall



Outdoor

V1

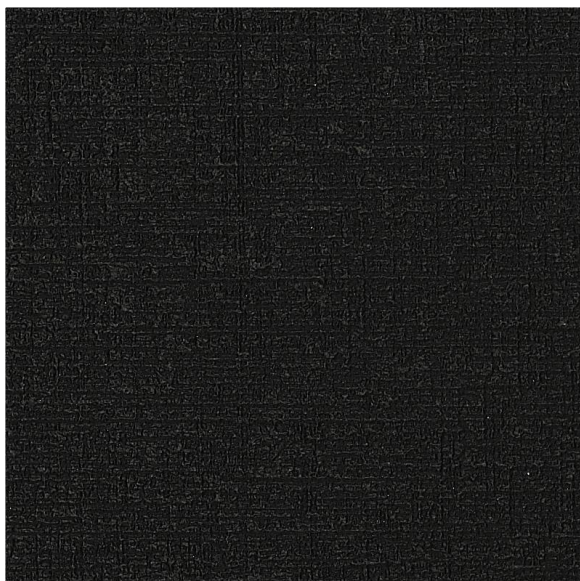

BLACK
LAPPATO SL200



60x60cm



Floor



Indoor



Wall

V1

PACKING LIST

| SIZE | FINISH | THICKNES S (mm) | PCS / M2 | PCS / CTN | CTN / PLT | PLT / 20'FCL | AVG WEIGHT / CTN (KG) | AVG WEIGHT / PLT (KG) |
|----------|-----------------|--------------------|-------------|--------------|--------------|-----------------|--------------------------|--------------------------|
| 60x60cm | Polished / Matt | 9.3 | 2.78 | 4 | 40 | 19 | 34.50 | 1,420 |
| 60x60cm | Lappato | 9.3 | 2.78 | 4 | 40 | 19 | 35.00 | 1,420 |
| 80x80cm | Polished / Matt | 10.3 | 1.56 | 2 | 36 | 19 | 38.00 | 1,388 |
| 60x120cm | Polished | 12.3 | 1.39 | 2 | 48 | 10 | 45.50 | 2,228 |
| 60x120cm | Matt / Rough | 12.3 | 1.39 | 2 | 48 | 10 | 46.00 | 2,228 |

TECHNICAL SPECIFICATION

MML PORCELAIN $E \leq 0.5\%$ (Bla, ANNEX G)

| TECHNICAL FEATURES | STANDARDS | INTERNATIONAL STANDARDS | MML TYPICAL STANDARDS |
|---|-----------------------|--|---|
| DIMENSIONAL CHARACTERISTICS | | | |
| Length & Width | ISO 10545-2 / EN 98 | $\pm 0.60\%$ max $\pm 2.0\text{mm}$ | $\pm 0.25\%$ max $\pm 2.0\text{mm}$ |
| Thickness | ISO 10545-2 / EN 98 | $\pm 5.00\%$ max $\pm 0.5\text{mm}$ | $\pm 5.00\%$ max $\pm 0.5\text{mm}$ |
| Straightness of Sides | ISO 10545-2 / EN 98 | $\pm 0.50\%$ max $\pm 1.5\text{mm}$ | $\pm 0.25\%$ max $\pm 1.5\text{mm}$ |
| Rectangularity | ISO 10545-2 / EN 98 | $\pm 0.50\%$ max $\pm 2.0\text{mm}$ | $\pm 0.30\%$ max $\pm 2.0\text{mm}$ |
| Surface Flatness | ISO 10545-2 / EN 98 | $\pm 0.50\%$ max $\pm 2.0\text{mm}$ | $\pm 0.25\%$ max $\pm 2.0\text{mm}$ |
| CHEMICAL PROPERTIES | | | |
| Resistance to Household Chemicals & Swimming Pool Salts | ISO 10545-13 / EN 106 | Min GB | GB |
| Resistance to Staining | ISO 10545-14 | Min Class 3 | Class 3 |
| PHYSICAL PROPERTIES | | | |
| Water Absorption | ISO 10545-3 / EN 99 | Group Bla, $E \leq 0.5\%$ | $\leq 0.5\%$ |
| Breaking Strength | ISO 10545-4 / EN 100 | Min 1300 N | 1300 N |
| Modulus of Rupture | ISO 10545-4 / EN 100 | Min 35 N / mm^2 | $> 35 \text{ N} / \text{mm}^2$ (Depending on Series) |
| Resistance to Surface Abrasion | ISO 10545-7 / EN 154 | Report Abrasion Class | Glazed: Class 2 – 4 (Depending on Glaze Type) |
| Resistance to Deep Abrasion | ISO 10545-6 / EN 102 | Max 175 mm^3 | Unglazed: Max 150 mm^3 |