





Be it industrial, minimalistic or natural interior styling, this versatile stone look makes a good fit for all occasions.


MYERS

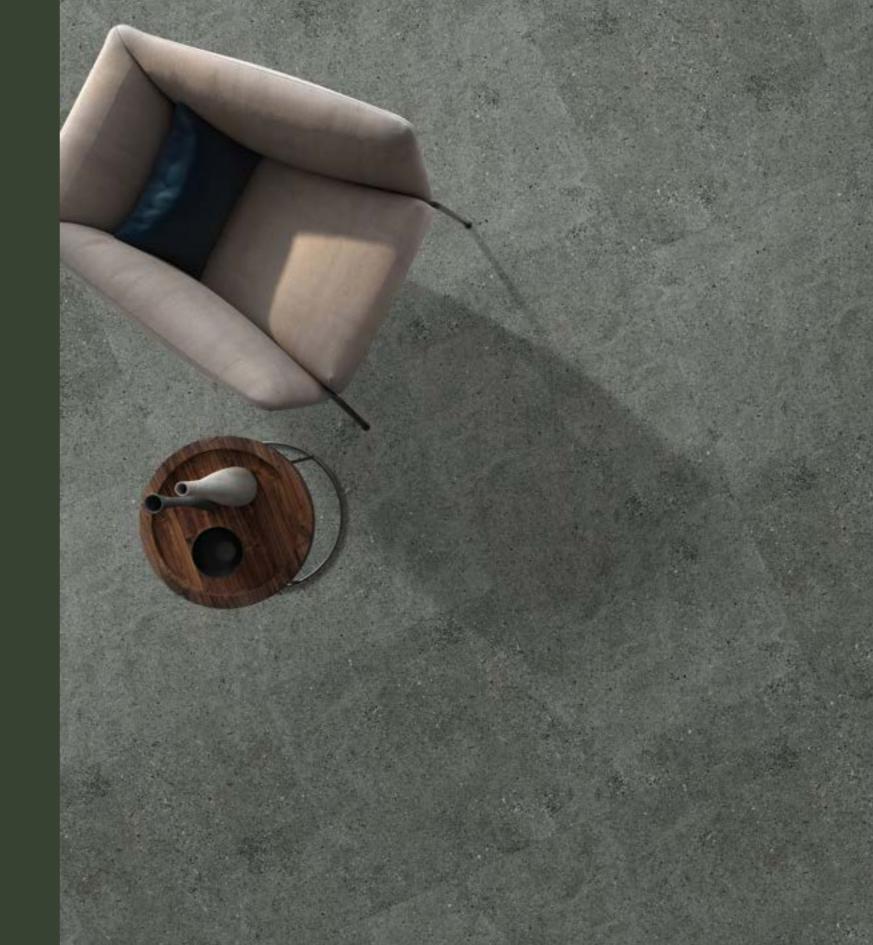

COLORS

MYERS

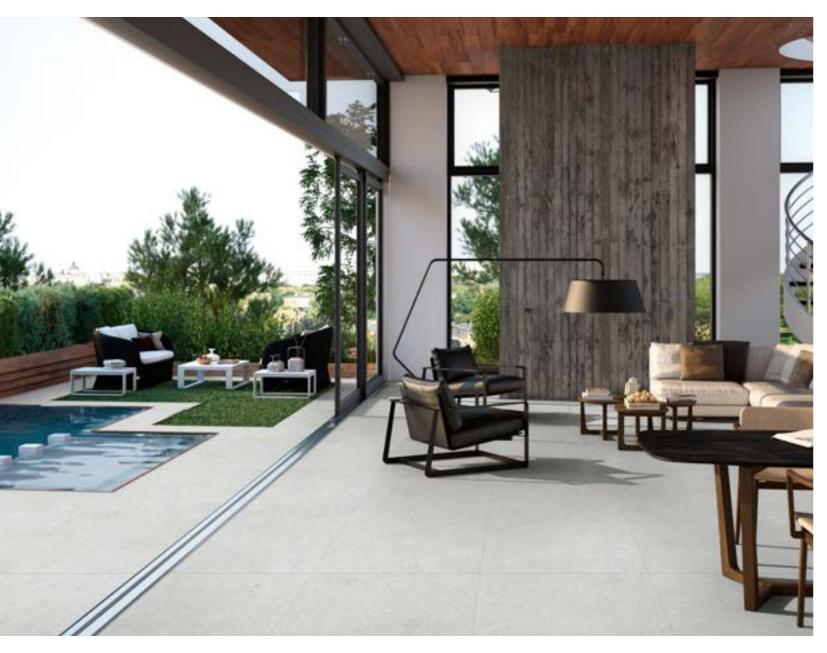

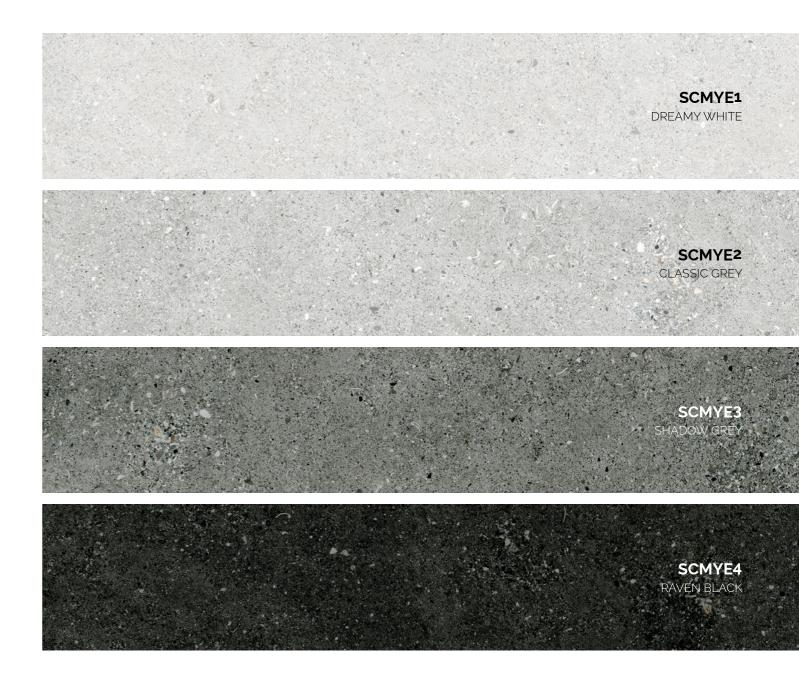

FLOOR: DREAMY WHITE **SCMYE1** 60x60cm / 24"x24"

4 5





MYERS

Product Information



CRYSTAL MATT

60x60cm 24"x24" 6 Faces 30)

12"x24" 8 Faces

CRYSTAL MATT 30x60cm

The second secon




11

Floor

SCMYE1 / DREAMY WHITE



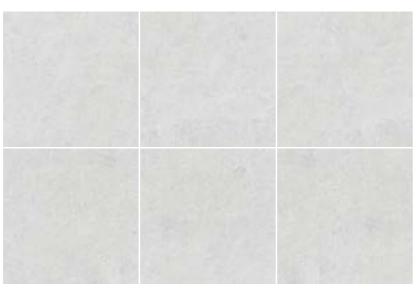


SCMYE2 / CLASSIC GREY






SCMYE3 / SHADOW GREY

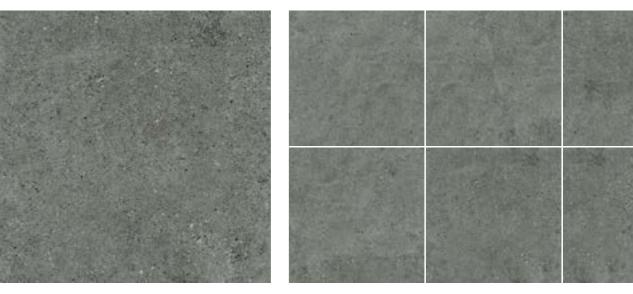

SCMYE4 / RAVEN BLACK

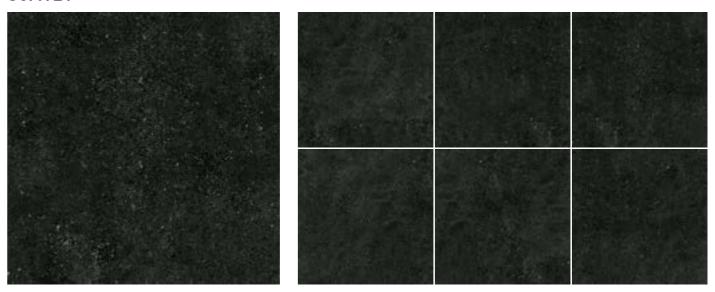

10

^{*} Colors and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

TECHNICAL SPECIFICATION

E ≤ 0.5% (Bla, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2	± 0.60% max ± 2.0mm	±0.25% max±2.0mm
Thickness	ISO 10545-2	±5.00% max ± 0.5mm	±5.00% max±0.5mm
Straightness of Sides	ISO 10545-2	±0.50% max±1.5mm	±0.25% max±1.5mm
Rectangularity	ISO 10545-2	±0.50% max±2.0mm	±0.30% max±2.0mm
Surface Flatness	ISO 10545-2	±0.50% max±2.0mm	± 0.25% max ± 2.0mm
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3	Group Bla, E ≤ 0.5%	≤ 0.5%
Breaking Strength	ISO 10545-4	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4	Min 35 N / mm²	> 35 N / mm² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7	Report Abrasion Class	Glazed: Class 2-4 (Depending on Glaze Type)

The above information serves as a general guideline only. Different types of tiles are made to meet different performance requirements. For legal compliance or for specific product technical performance, please request for a confirmation or test report.



FOLLOW US ON:











