

BASALT



QUALITY. GUARANTEED.

Whether you wish to create visual interest or keep things simple to suit your minimalist taste, the alluring beauty of Basalt stone works well for virtually all project concepts. Our Basalt collection comes in a rich colour palette of Bianco, Cream, Latte, Grey, Dark Grey and Charcoal. Different colours evoke different emotions in your spaces, so there is sure to be one Basalt colour tone to satisfy your individual preference.

BASALT



BASALT

COLORS

A timeless basalt stone look.



SMBAS1
BIANCO



SMBAS4
Grey



SMBAS2
CREAM



SMBAS5
Dark Grey



SMBAS3
LATTE



SMBAS6
Charcoal



WALL: CREAM **SMBAS2**
FLOOR: LATTI **SMBAS3**
30x60cm / 12"x24"



FLOOR: DARK GREY **SMBASS**
30x60cm / 12"x24"

BASALT

Product Information




Rectified
Eco Label
Flat

MATT
60x60cm
24"x24"
15 Faces


MATT
30x60cm
12"x24"
25 Faces

-  Floor
-  Wall
-  Outdoor
-  Indoor


SMBAS1 / BIANCO

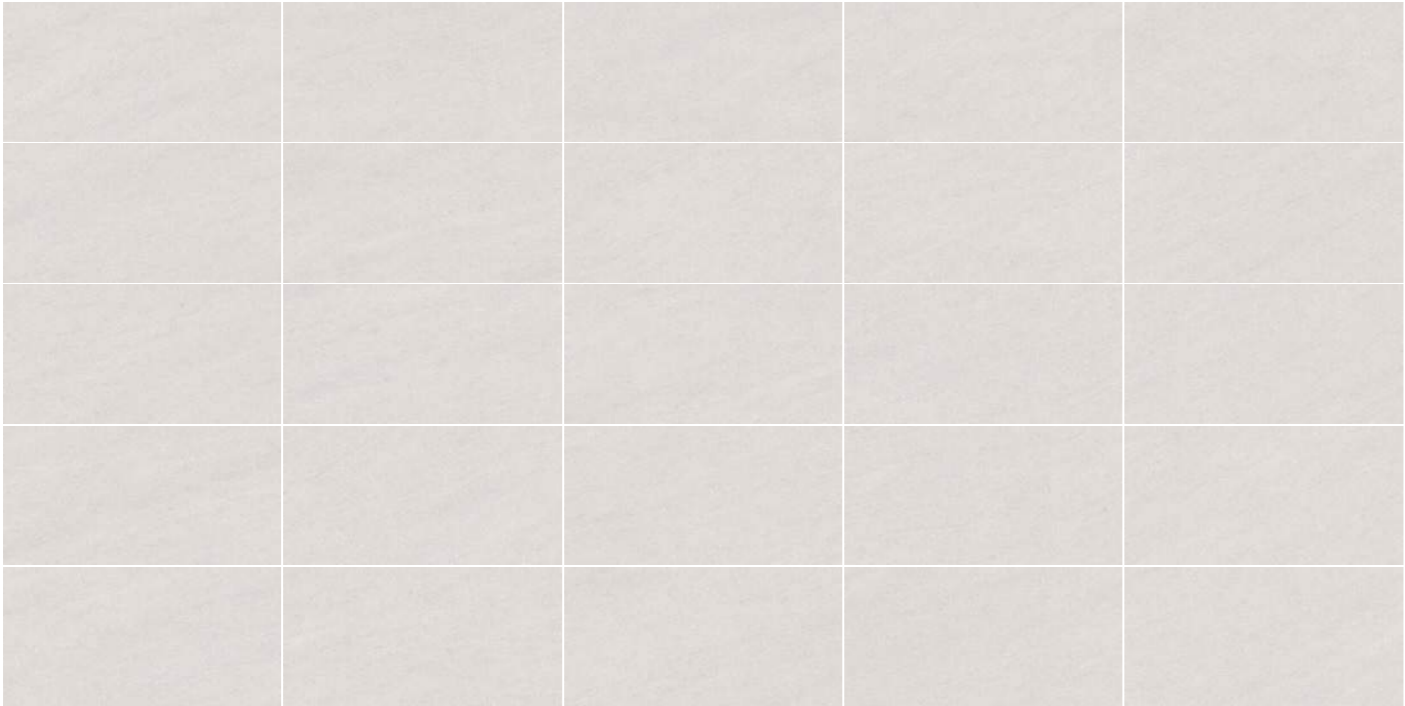

SMBAS2 / CREAM

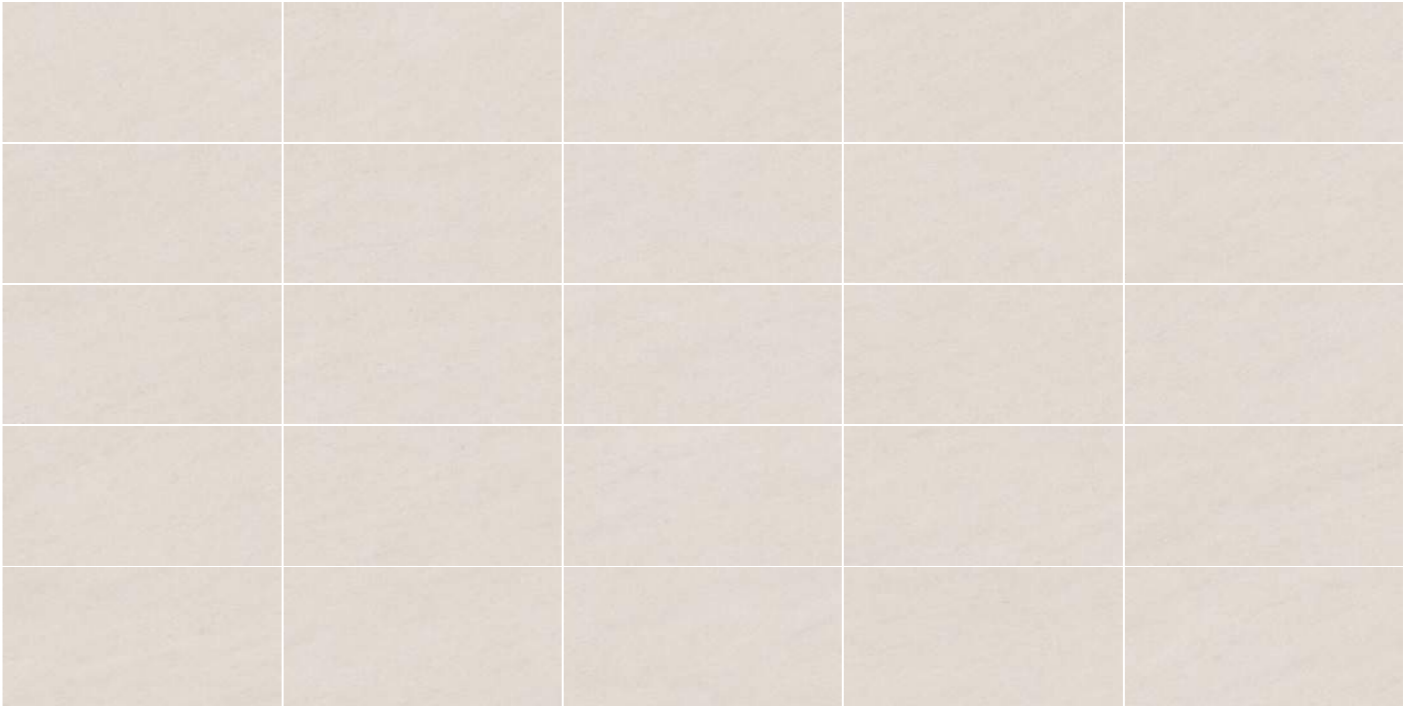


SMBAS3 / LATTE

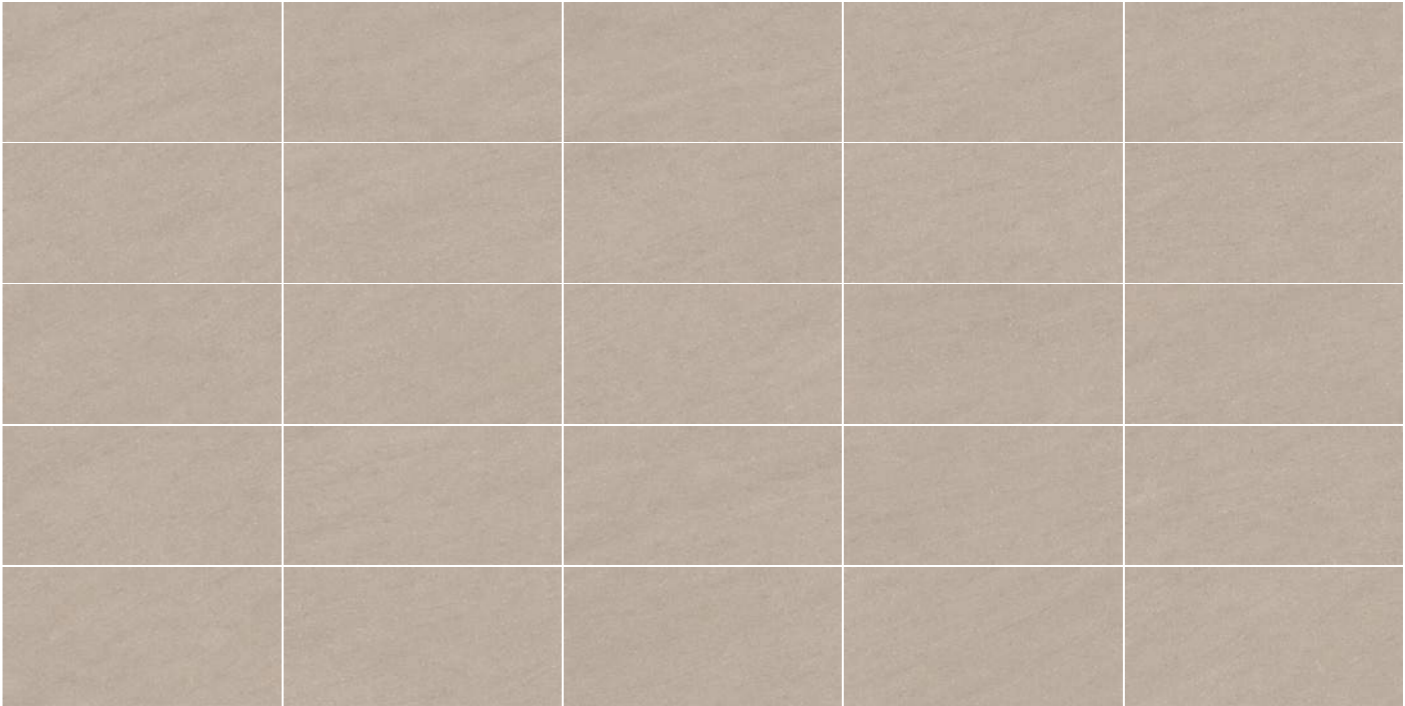

* Colors and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.



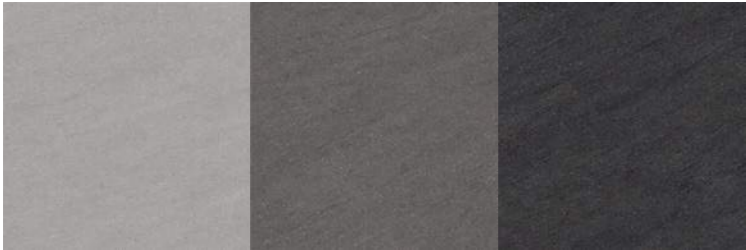

BASALT

Product Information




MATT
60x60cm
24"x24"
15 Faces

MATT
30x60cm
12"x24"
25 Faces

-  Floor
-  Wall
-  Outdoor
-  Indoor


SMBAS4 / GREY

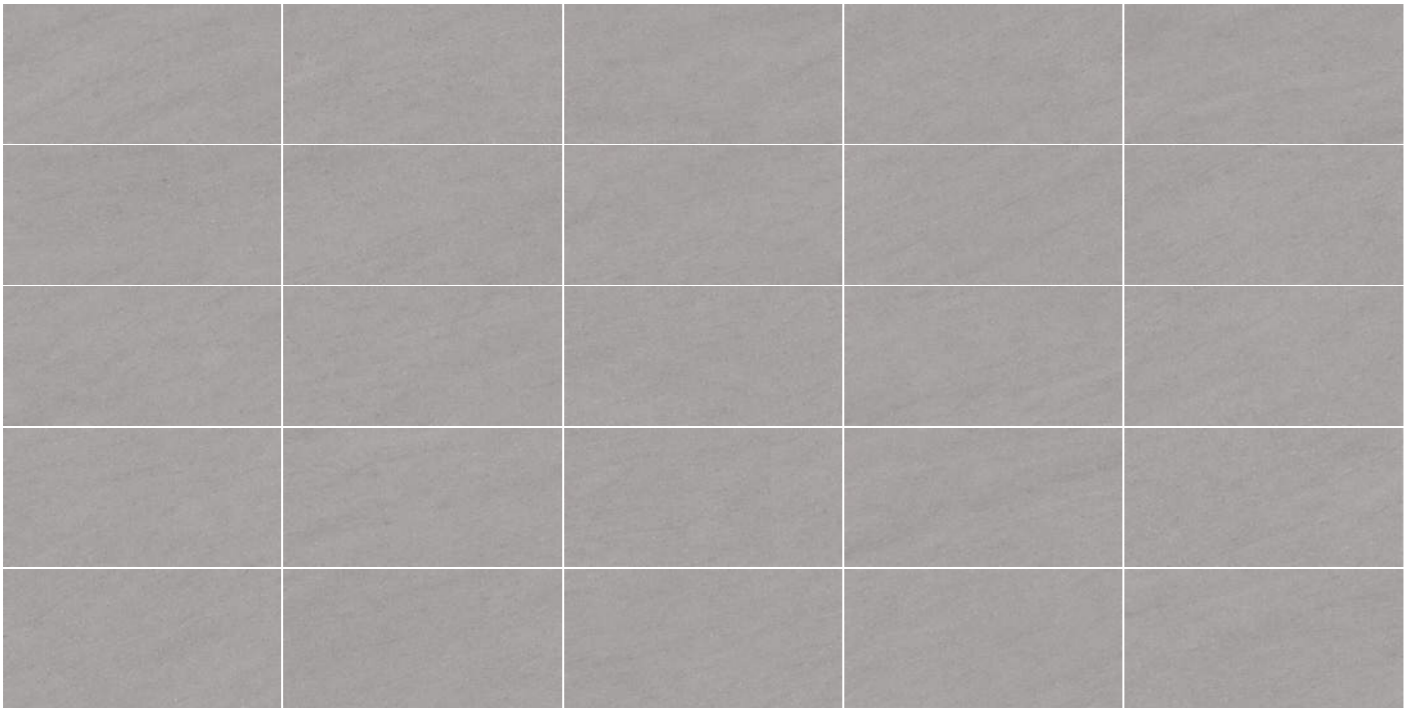

SMBAS5 / DARK GREY



SMBAS6 / CHARCOAL

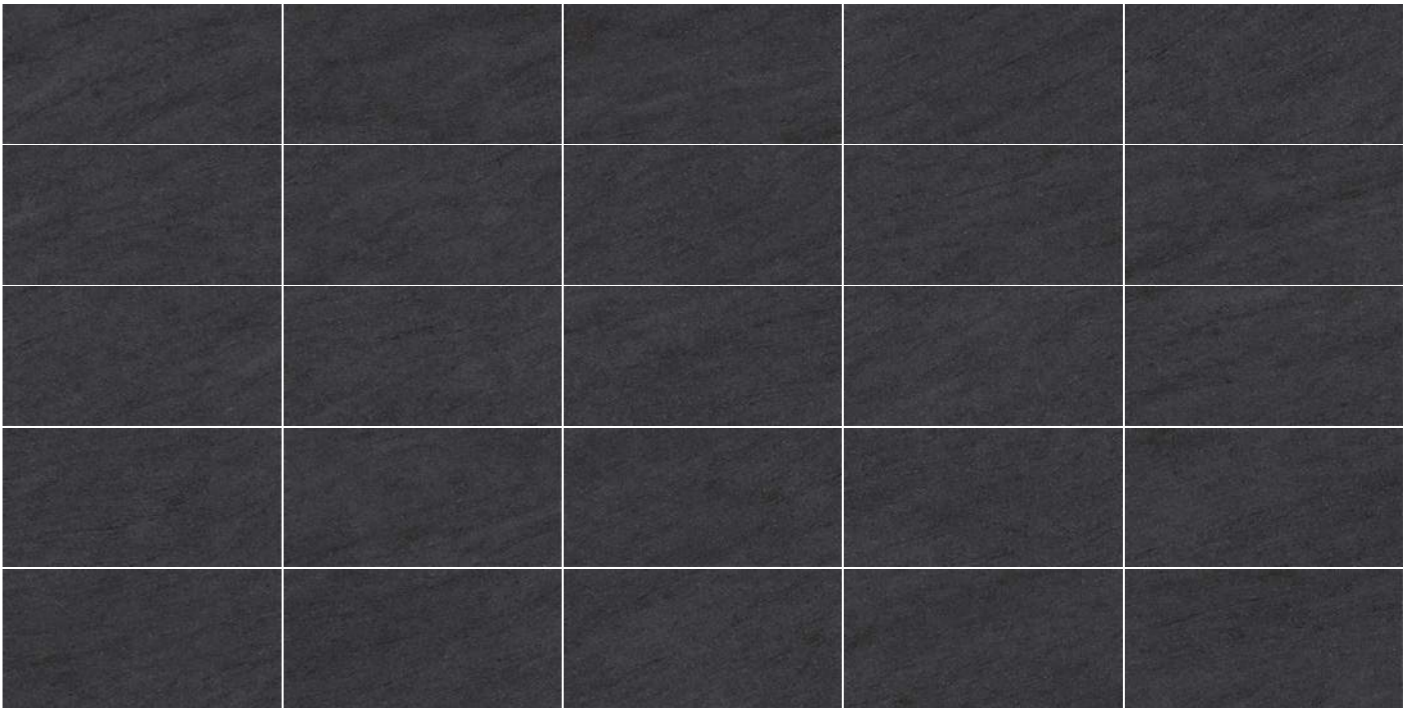

* Colors and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

TECHNICAL SPECIFICATION

$E \leq 0.5\%$ (Bla, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2	$\pm 0.60\%$ max $\pm 2.0\text{mm}$	$\pm 0.25\%$ max $\pm 2.0\text{mm}$
Thickness	ISO 10545-2	$\pm 5.00\%$ max $\pm 0.5\text{mm}$	$\pm 5.00\%$ max $\pm 0.5\text{mm}$
Straightness of Sides	ISO 10545-2	$\pm 0.50\%$ max $\pm 1.5\text{mm}$	$\pm 0.25\%$ max $\pm 1.5\text{mm}$
Rectangularity	ISO 10545-2	$\pm 0.50\%$ max $\pm 2.0\text{mm}$	$\pm 0.30\%$ max $\pm 2.0\text{mm}$
Surface Flatness	ISO 10545-2	$\pm 0.50\%$ max $\pm 2.0\text{mm}$	$\pm 0.25\%$ max $\pm 2.0\text{mm}$
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3	Group Bla, $E \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4	Min 35 N / mm ²	> 35 N / mm ² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7	Report Abrasion Class	Glazed: Class 2-4 (Depending on Glaze Type)

The above information serves as a general guideline only. Different types of tiles are made to meet different performance requirements. For legal compliance or for specific product technical performance, please request for a confirmation or test report.



QUALITY. GUARANTEED.

FOLLOW US ON:

