



TRAVESTONE



QUALITY. GUARANTEED.

Infusing old world charm with modern vibes, this natural travertine design adds subtle detail and interest to your spaces. Add a touch of class with Travestone in Avorio. Get rustic warmth with Travestone in Cream. Or create industrial luxe aesthetics in light grey tones with Travestone in Silver. Travestone offers timeless versatility in a matt finish to effortlessly blend in to interiors of different styles.

TRAVESTONE



TRAVESTONE

COLOURS

Epitomising the natural charm of travertine stone.



FLOOR: SILVER **SMTRA3** 30x60cm / 12"x24"



SMTRA1
AVORIO



SMTRA2
CREAM



SMTRA3
SILVER



WALL&FLOOR: CREAM **SMTRA2** 30x60cm / 12"x24"



WALL&FLOOR: AVORIO **SMTRA1** 30x60cm / 12"x24"


WALL: SILVER **SMTRA3** 30x60cm / 12"x24"

TRAVESTONE

Product Information



SMTRA1 / AVORIO

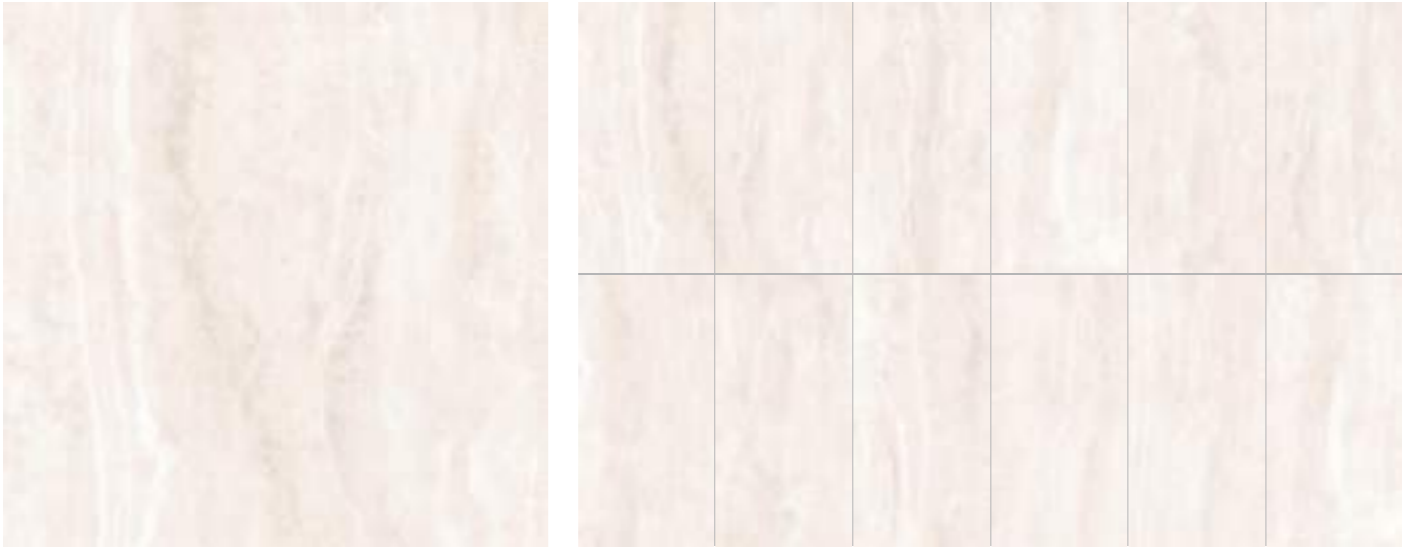

SMTRA3 / SILVER



SMTRA2 / CREAM



<p>MATT</p> <p>60x60cm 24"x24"</p> <p>6 Faces</p>	<p>MATT</p> <p>30x60cm 12"x24"</p> <p>12 Faces</p>
--	---

- Floor
- Wall
- Outdoor
- Indoor

* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

TECHNICAL SPECIFICATION

$E \leq 0.5\%$ (Bla, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2	$\pm 0.60\%$ max $\pm 2.0\text{mm}$	$\pm 0.25\%$ max $\pm 2.0\text{mm}$
Thickness	ISO 10545-2	$\pm 5.00\%$ max $\pm 0.5\text{mm}$	$\pm 5.00\%$ max $\pm 0.5\text{mm}$
Straightness of Sides	ISO 10545-2	$\pm 0.50\%$ max $\pm 1.5\text{mm}$	$\pm 0.25\%$ max $\pm 1.5\text{mm}$
Rectangularity	ISO 10545-2	$\pm 0.50\%$ max $\pm 2.0\text{mm}$	$\pm 0.30\%$ max $\pm 2.0\text{mm}$
Surface Flatness	ISO 10545-2	$\pm 0.50\%$ max $\pm 2.0\text{mm}$	$\pm 0.25\%$ max $\pm 2.0\text{mm}$
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3	Group Bla, $E \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4	Min 35 N / mm ²	> 35 N / mm ² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7	Report Abrasion Class	Glazed: Class 2-4 (Depending on Glaze Type)



QUALITY. GUARANTEED.

FOLLOW US ON:



The above information serves as a general guideline only. Different types of tiles are made to meet different performance requirements. For legal compliance or for specific product technical performance, please request for a confirmation or test report.