



ALCHEMY




QUALITY. GUARANTEED.

TIMELESS ELEGANCE

Derived from the picturesque banks of the Isar River in the German Alps, ALCHEMY captures the essence of nature's artistry and is an exquisite showcase of a sense of style and sophistication that stands the test of time. Each of its four distinctive colour choices offer a unique interpretation of its own, reminiscent of dancing waves, with each delicate vein exuding charm and depth to embrace your living spaces.

ALCHEMY

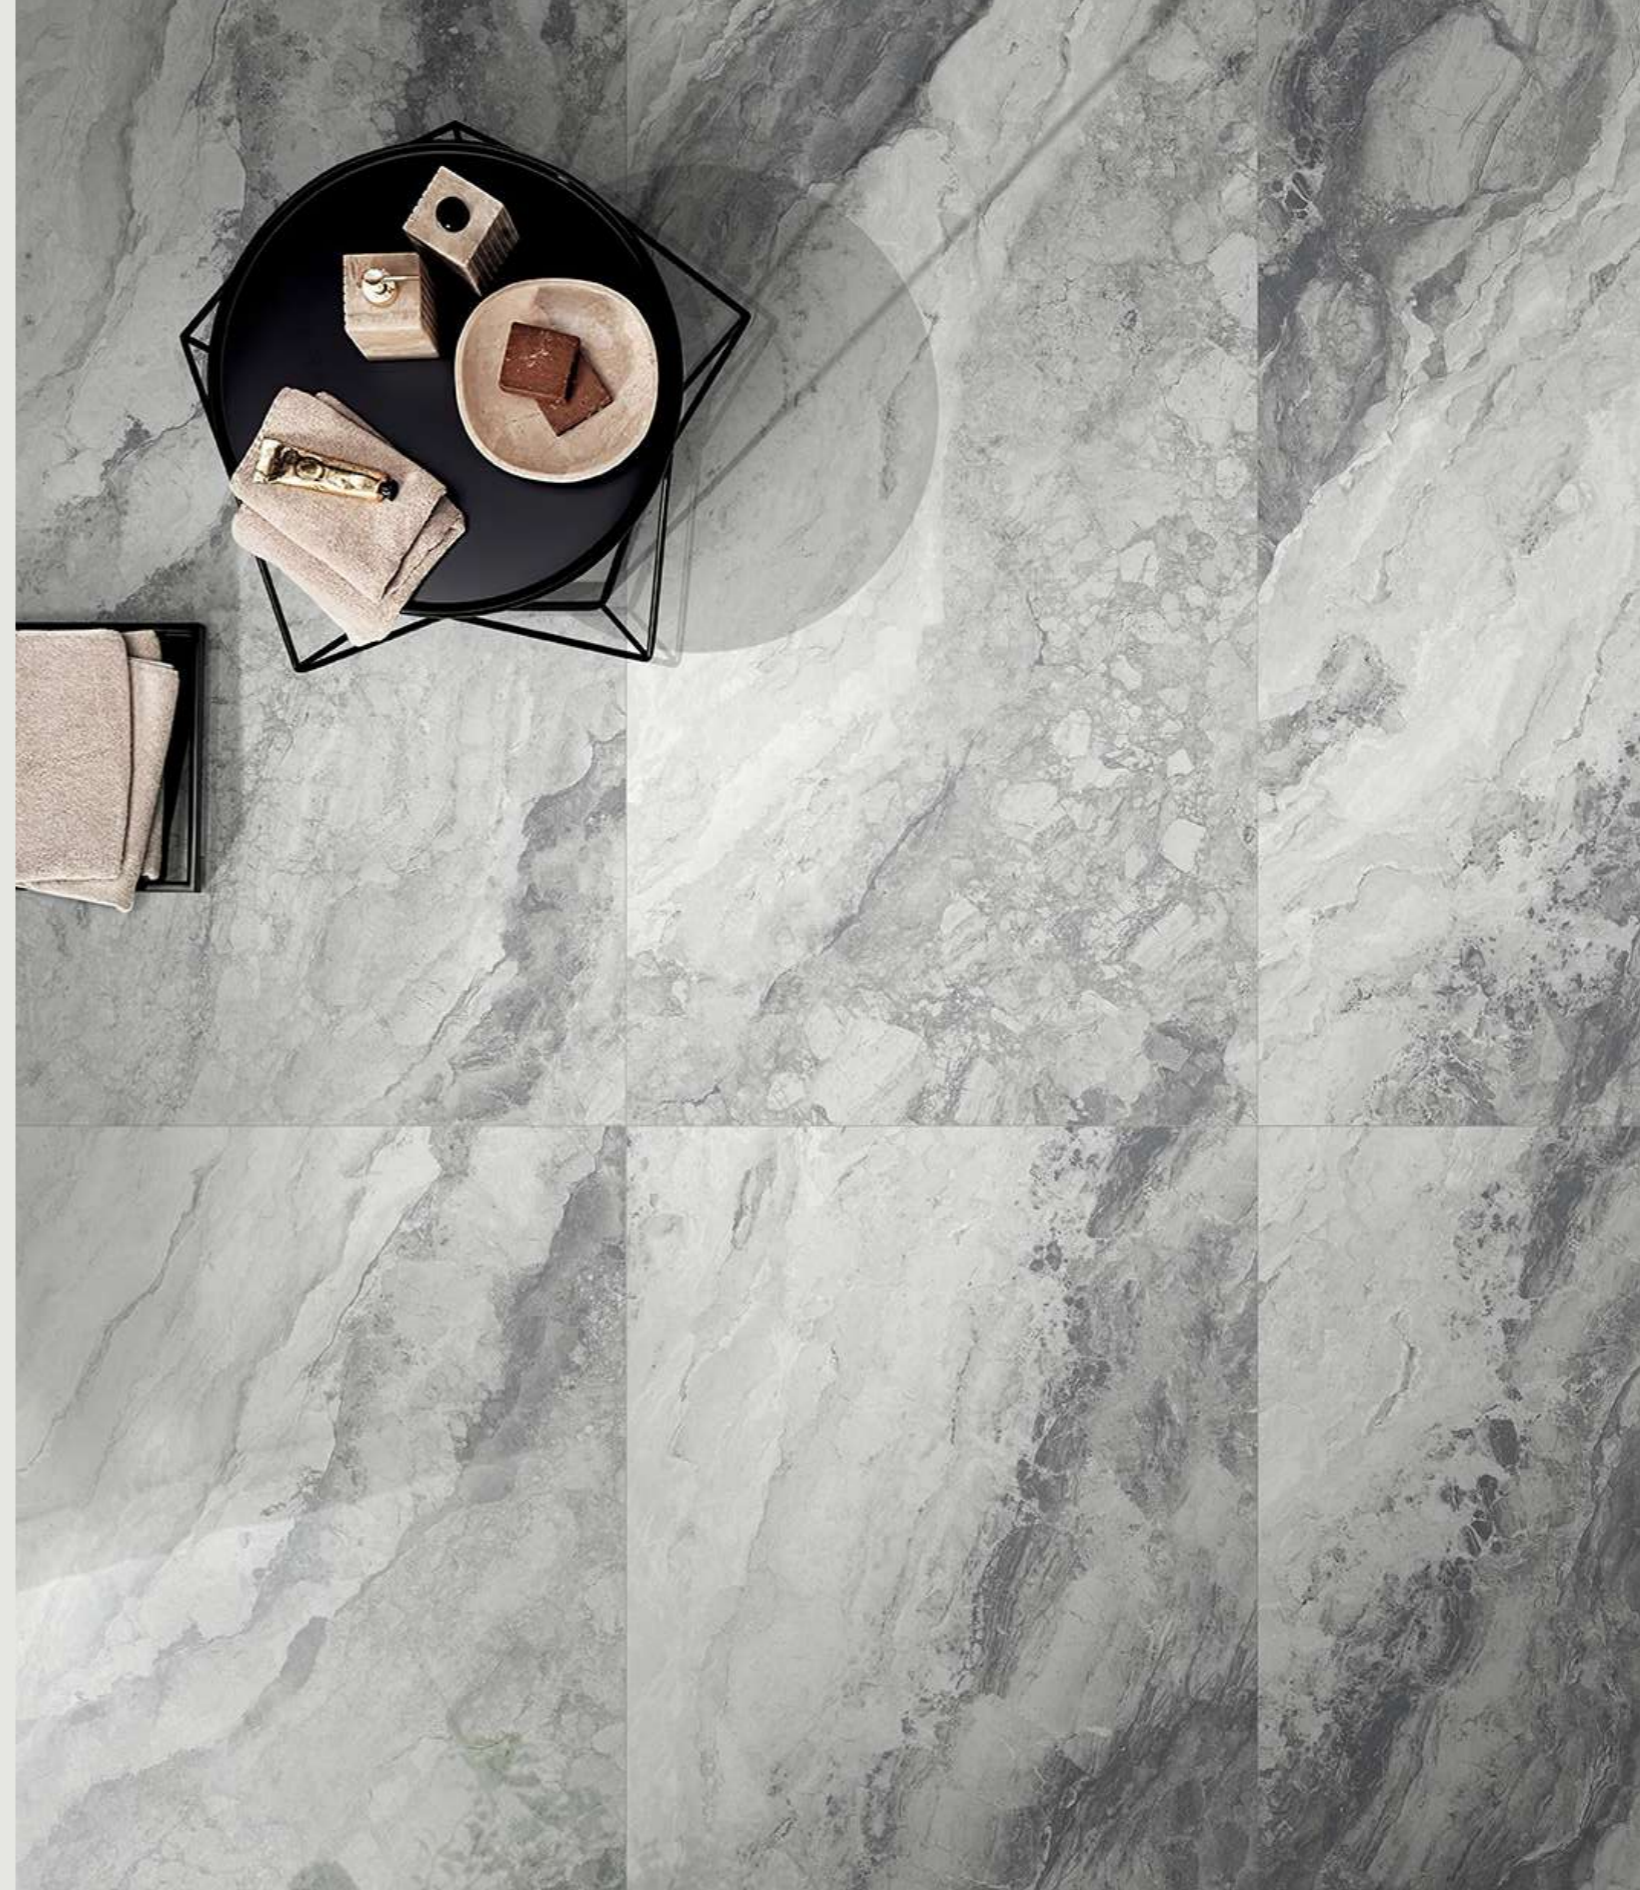

ALCHEMY


COLOURS



WALL&FLOOR: BEIGE **PXALC3** 60x120cm / 24"x48"



SLALC1 | PXALC1
SILVER

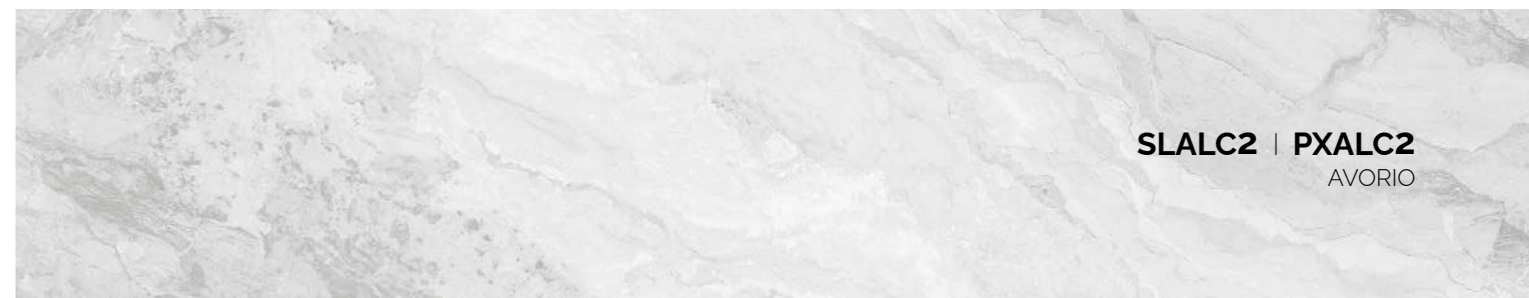

SLALC2 | PXALC2
AVORIO



SLALC3 | PXALC3
BEIGE



SLALC4 | PXALC4
SLATE



FINISHING | POLISHED

WALL&FLOOR: AVORIO **PXALC2** 60x120cm / 24"x48"




FLOOR: SLATE PXALC4 60x120cm / 24"x48"


ALCHEMY

V2 Rectified
Eco MML
Flat


FINISHING **S** SATIN **P** POLISHED

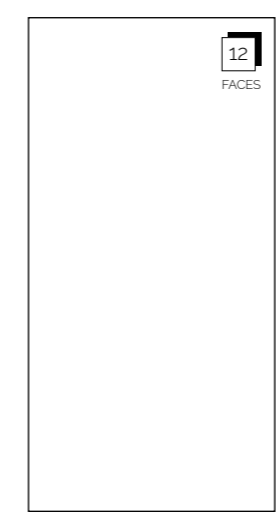

60x120cm
24"x48"



60x60cm
24"x24"



30x60cm
12"x24"

COLOURS



Floor Wall Indoor

* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

S SLALC1 | **P** PXALC1 / SILVER

60x120cm 24"x48"



S SLALC3 | **P** PXALC3 / BEIGE

60x120cm 24"x48"



S SLALC2 | **P** PXALC2 / AVORIO

60x120cm 24"x48"



S SLALC4 | **P** PXALC4 / SLATE

60x120cm 24"x48"



TECHNICAL SPECIFICATION MML PORCELAIN (RECTIFIED)


E ≤ 0.5% (Bla, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2	± 0.30% max ± 1.0mm	± 0.25% max ± 1.0mm
Thickness	ISO 10545-2	± 5.00% max ± 0.5mm	± 5.00% max ± 0.5mm
Straightness of Sides	ISO 10545-2	± 0.30% max ± 0.8mm	± 0.25% max ± 0.8mm
Rectangularity	ISO 10545-2	± 0.30% max ± 1.5mm	± 0.30% max ± 1.5mm
Surface Flatness	ISO 10545-2	± 0.40% max ± 1.8mm	± 0.25% max ± 1.8mm
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3	Group Bla, E ≤ 0.5%	≤ 0.5%
Breaking Strength	ISO 10545-4	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4	Min 35 N / mm ²	> 35 N / mm ² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7	Report Abrasion Class	Glazed: Class 2-4 (Depending on Glaze Type)



QUALITY. GUARANTEED.

FOLLOW US ON:



mymml.com



[mmlglobal](#)



[mmlglobal](#)



The above information serves as a general guideline only. Different types of tiles are made to meet different performance requirements. For legal compliance or for specific product technical performance, please request for a confirmation or test report.