

MINERAL



QUALITY. GUARANTEED.

NATURE AS IT IS

MINERAL seamlessly translates the organic beauty of natural raw stones into a harmonious blend of rugged textures and hues. Forging a deep connection between you, your spaces and our natural surroundings, each colour in MINERAL collection embodies a unique personality to showcase nature as it is.

MINERAL



MINERAL

COLOURS



WALL: GRAVEL **SMMIN3** + BIANCO **SMMIN1** 30x60cm / 12"x24"
FLOOR: GRAVEL **SMMIN3** 60x60cm / 24"x24"



SMMIN1
BIANCO

SMMIN2
EARTH

SMMIN3
GRAVEL

SMMIN4
SAND

FLOOR:
BIANCO **SMMIN1** 60x120cm / 24"x48"





WALL: EARTH **SMMIN2** 60x120cm / 24"x48"
 FLOOR: SAND **SMMIN4** 60x120cm / 24"x48"


MINERAL

V2
 Rectified
 Eco MML
 Structured

FINISHING **NATURAL**



60x120cm
 24"x48"




60x60cm
 24"x24"



30x60cm
 12"x24"

COLOURS

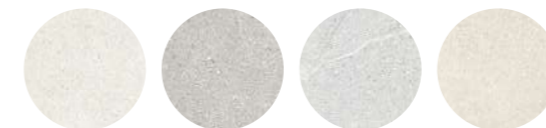


* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

MINERAL



SMMIN1 / BIANCO

60x120cm 24"x48"

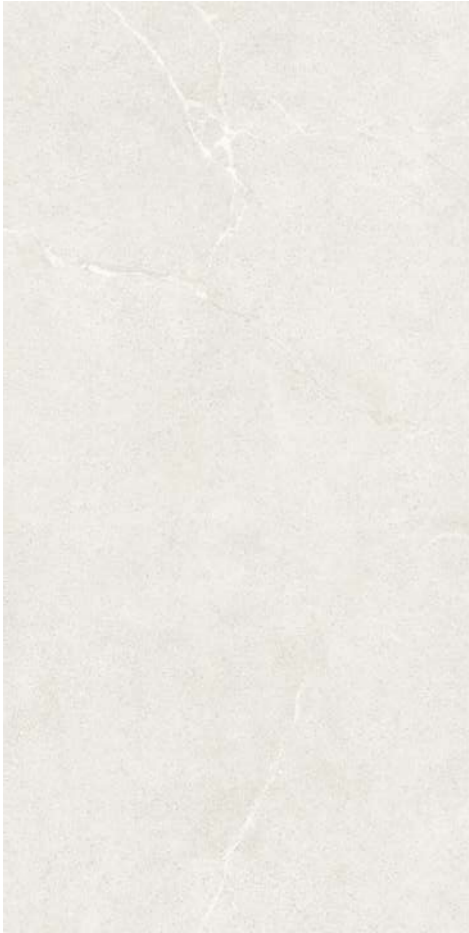

60x60cm 24"x24"



SMMIN2 / EARTH

60x120cm 24"x48"



60x60cm 24"x24"



* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

MINERAL



SMMIN3 / GRAVEL

60x120cm 24"x48"



60x60cm 24"x24"



SMMIN4 / SAND

60x120cm 24"x48"



60x60cm 24"x24"



* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

TECHNICAL SPECIFICATION MML PORCELAIN (RECTIFIED)


E ≤ 0.5% (Bla, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2	± 0.30% max ± 1.0mm	± 0.25% max ± 1.0mm
Thickness	ISO 10545-2	± 5.00% max ± 0.5mm	± 5.00% max ± 0.5mm
Straightness of Sides	ISO 10545-2	± 0.30% max ± 0.8mm	± 0.25% max ± 0.8mm
Rectangularity	ISO 10545-2	± 0.30% max ± 1.5mm	± 0.30% max ± 1.5mm
Surface Flatness	ISO 10545-2	± 0.40% max ± 1.8mm	± 0.25% max ± 1.8mm
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3	Group Bla, E ≤ 0.5%	≤ 0.5%
Breaking Strength	ISO 10545-4	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4	Min 35 N / mm ²	> 35 N / mm ² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7	Report Abrasion Class	Glazed: Class 2-4 (Depending on Glaze Type)



QUALITY. GUARANTEED.

FOLLOW US ON:



mymml.com



[mmlglobal](#)



[mmlglobal](#)



The above information serves as a general guideline only. Different types of tiles are made to meet different performance requirements. For legal compliance or for specific product technical performance, please request for a confirmation or test report.