



OAKLEY




QUALITY. GUARANTEED.

CLASSIC OAK COMFORT

Reminiscent to the weathered wooden dance floors of ballet studios, OAKLEY emanates an air of warmth and elegance in a spectrum of five natural oak wood colours: Light Wood, Natural Wood, Warm Wood, Brown Wood and Dark Wood. The nuances of its natural wood textures has been meticulously crafted to perfection, ensuring that its darker shades are rich without being overwhelming, and its lighter hues maintain their natural charm without becoming overly delicate.

OAKLEY

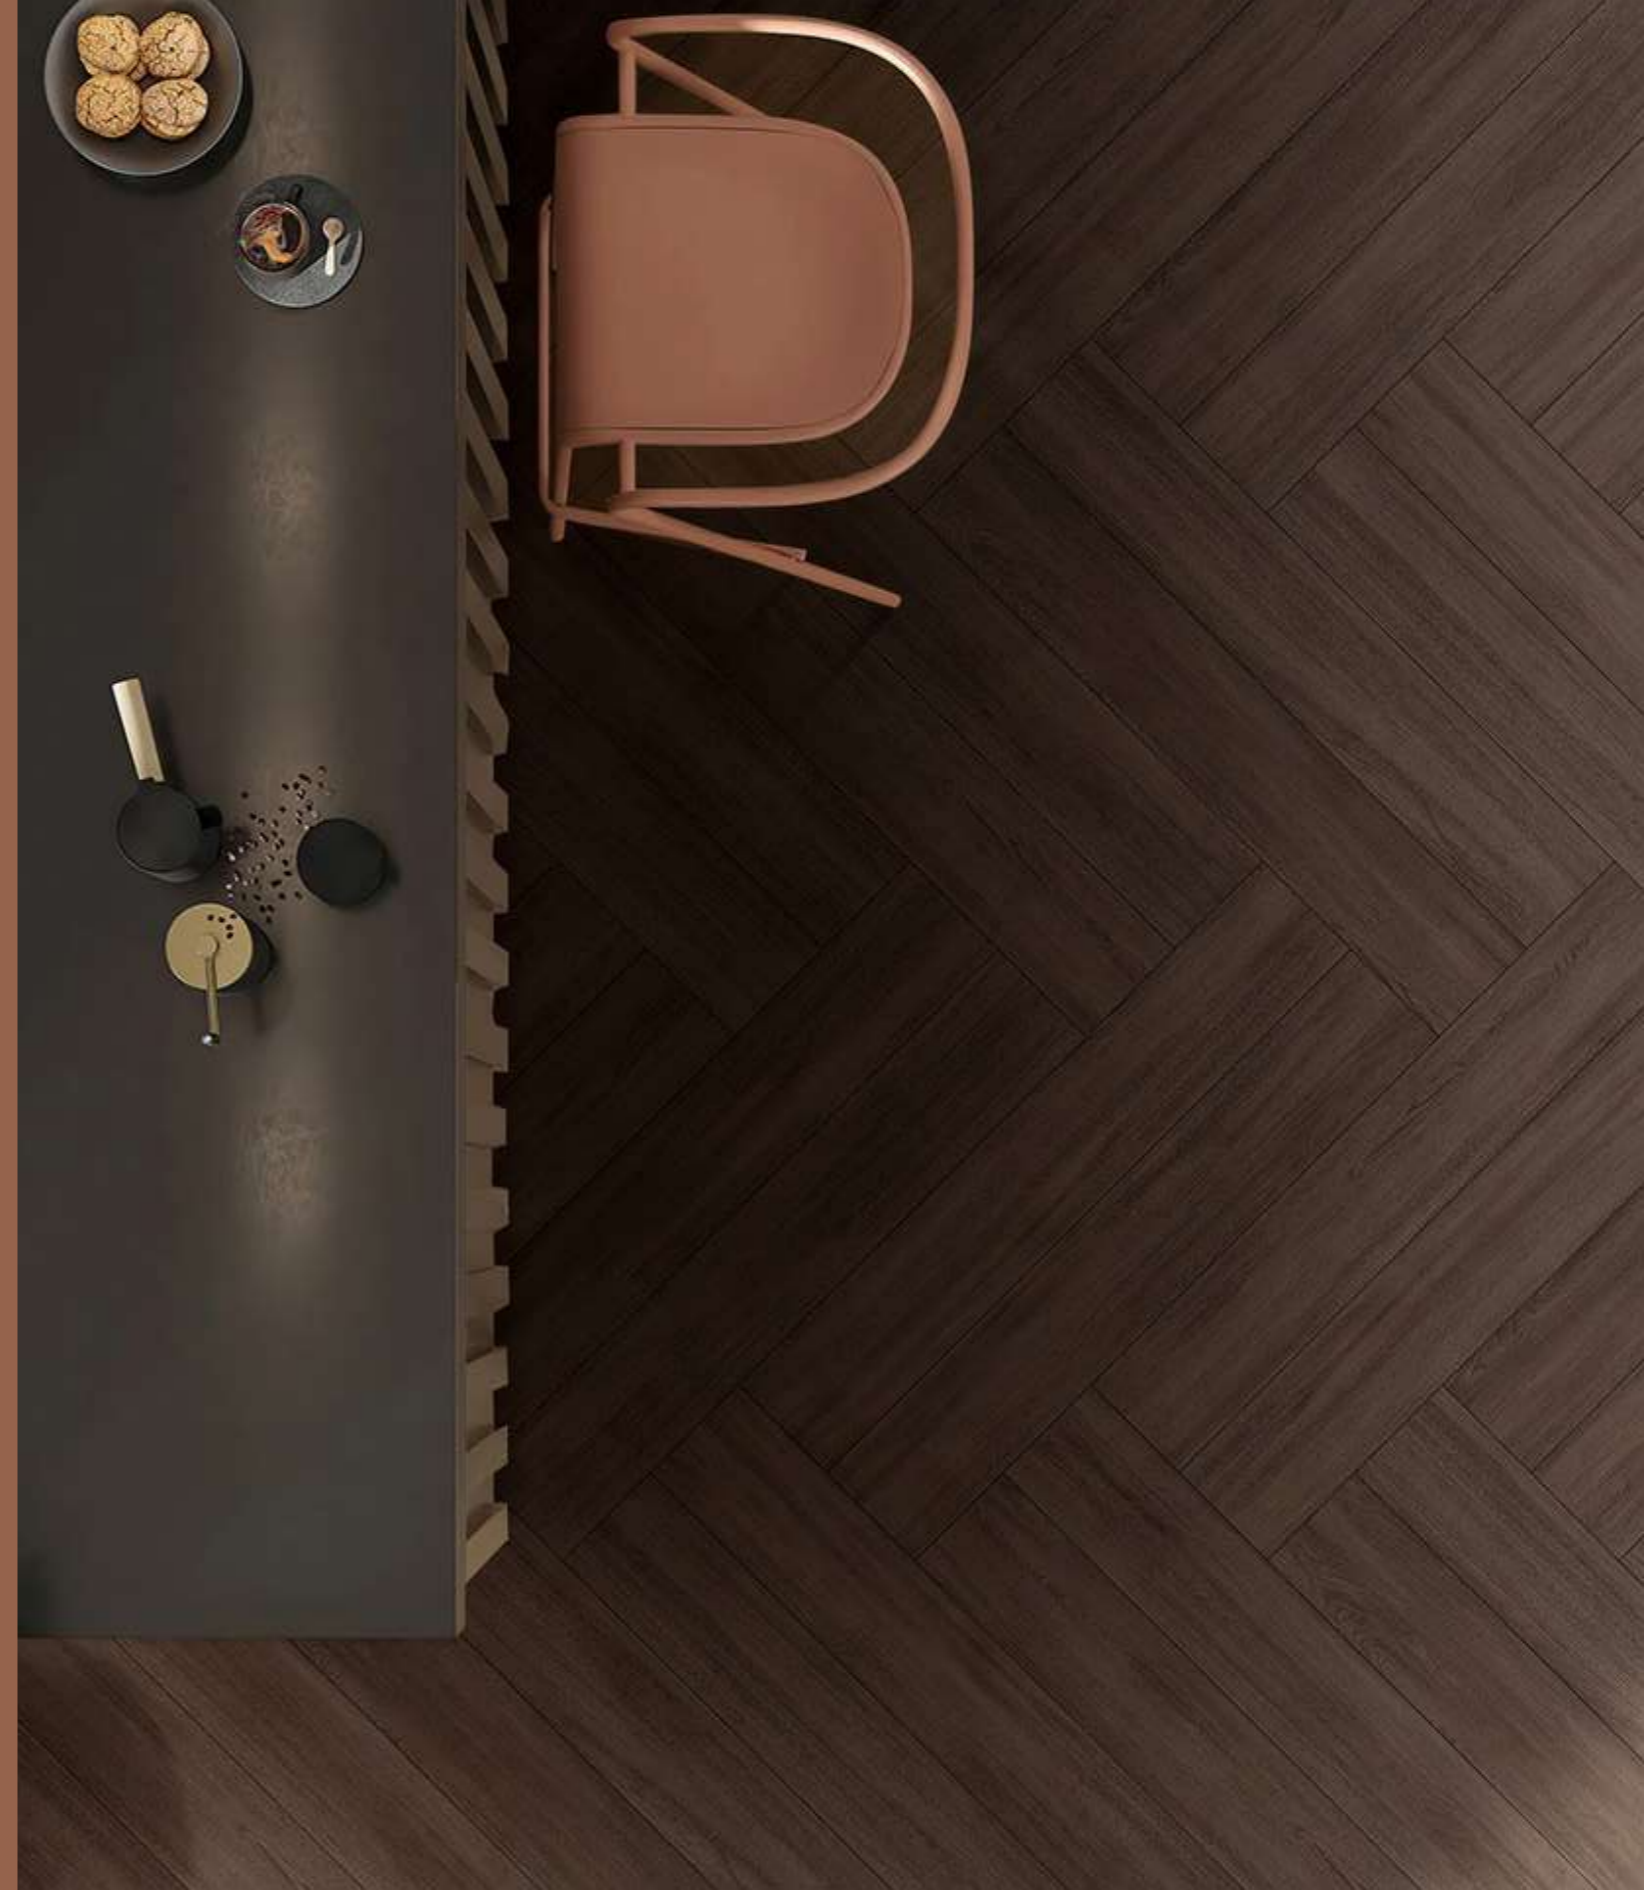

OAKLEY

COLOURS



SMOAK1
LIGHT

SMOAK2
NATURAL

SMOAK3
WARM

SMOAK4
BROWN

SMOAK5
DARK

FLOOR: WARM **SMOAK3** 20x120cm / 8'x48"



FLOOR:
LIGHT **SMAK1** 20x120cm / 8'x48'



FLOOR: NATURAL **SMOAK2** 20x120cm / 8"x48"

OAKLEY

V2
Rectified
Eco MML
Flat

FINISHING **MATT**

COLOURS



20x120cm
8"x48"



-  Floor
-  Wall
-  Outdoor
-  Indoor

* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.


OAKLEY

V2
Rectified
Eco MML
Flat

SMOAK1 / LIGHT




SMOAK2 / NATURAL

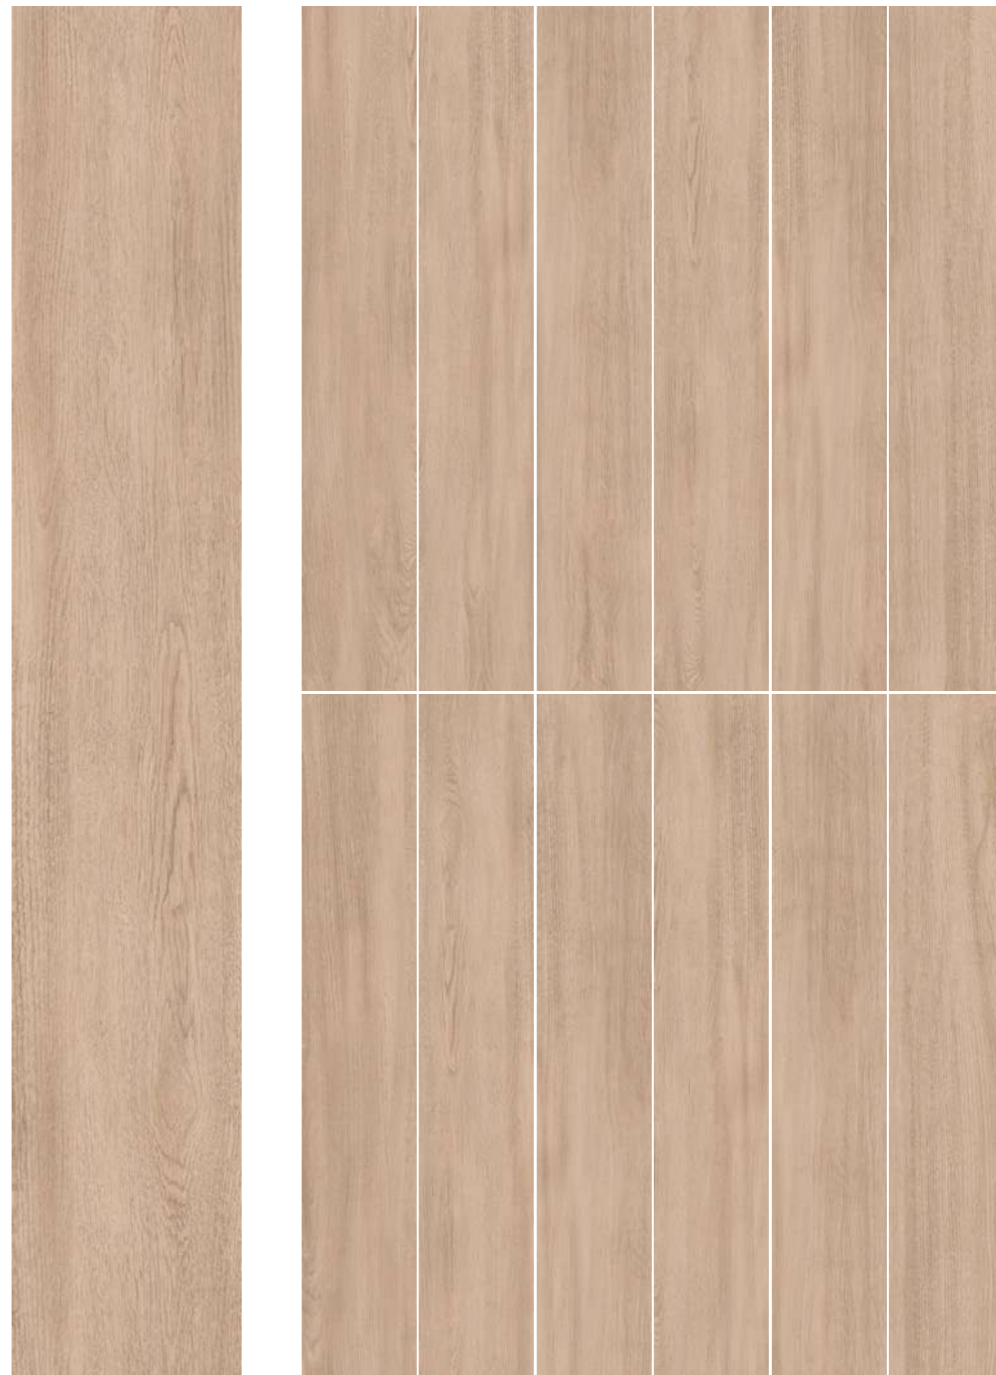


OAKLEY

V2
Rectified
Eco MML
Flat

SMOAK3 / WARM

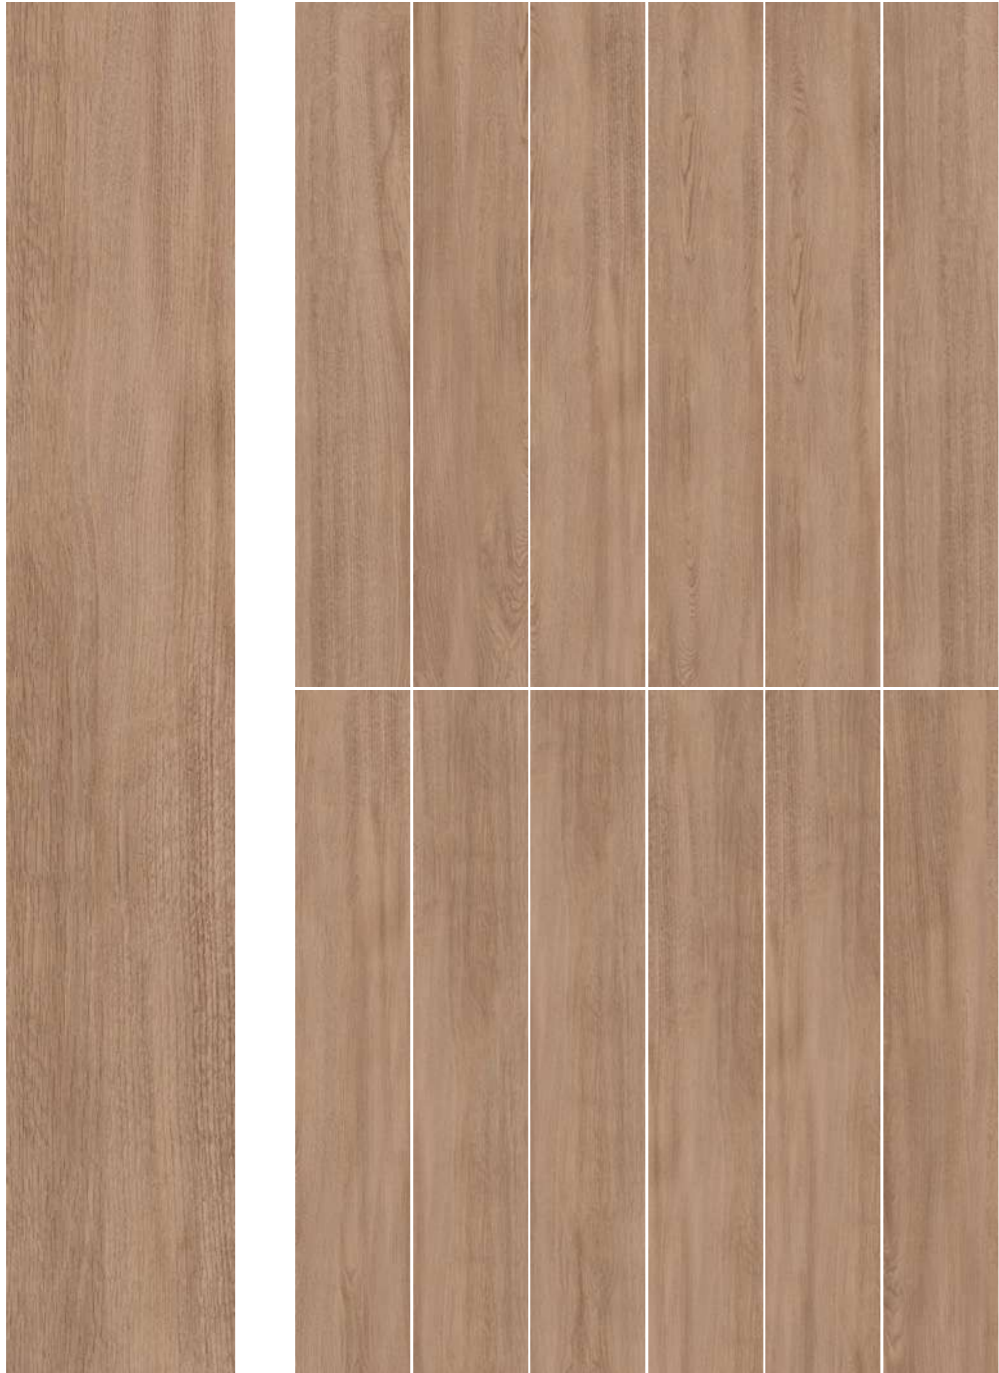


SMOAK4 / BROWN

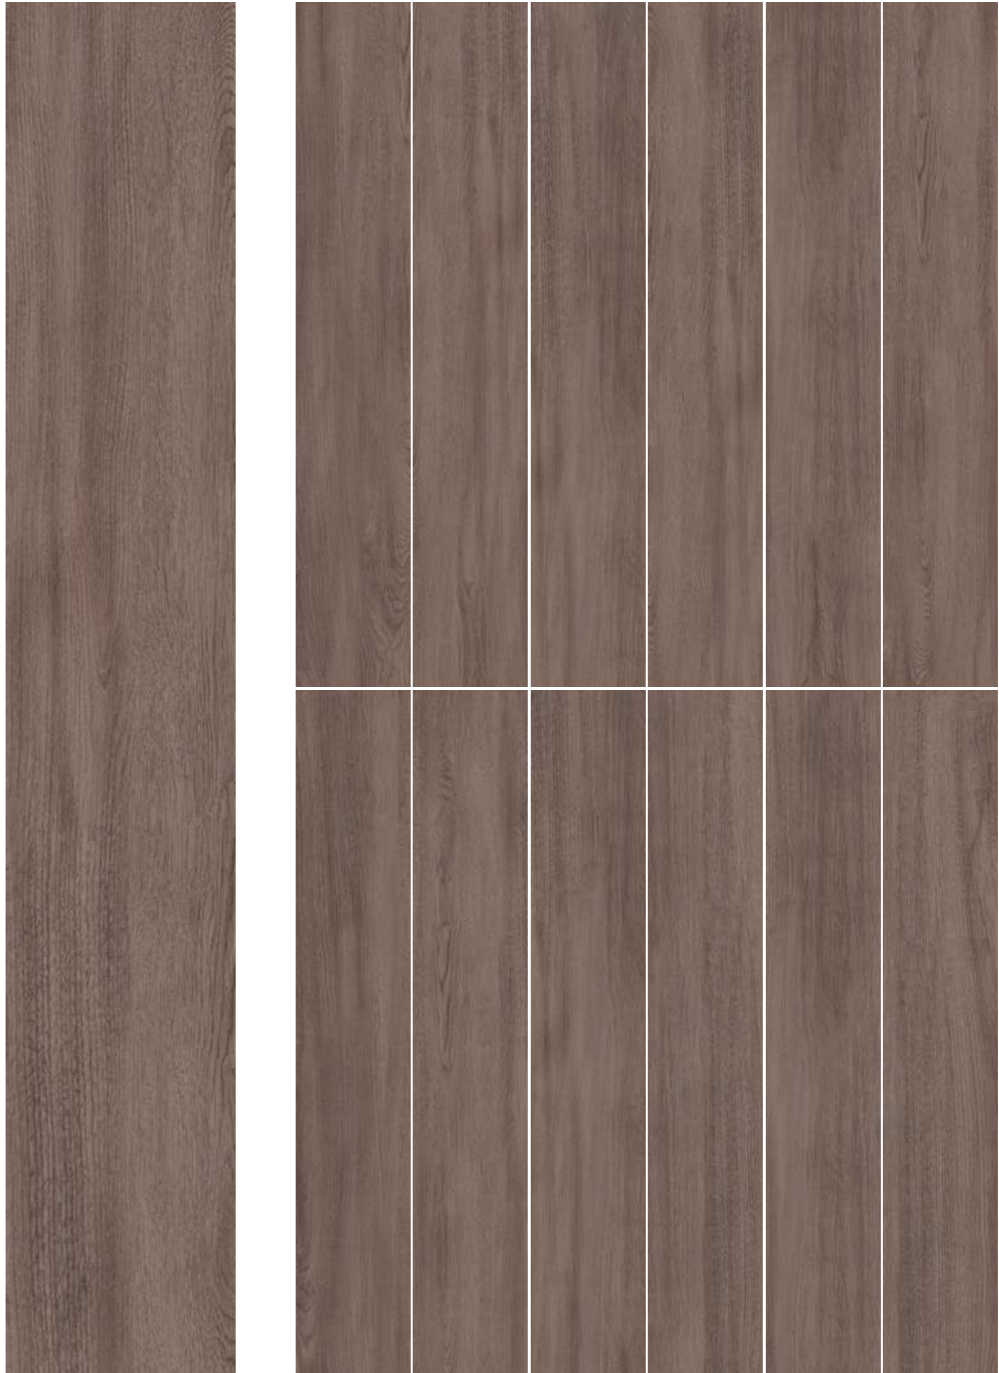

OAKLEY

SMOAK5 / DARK

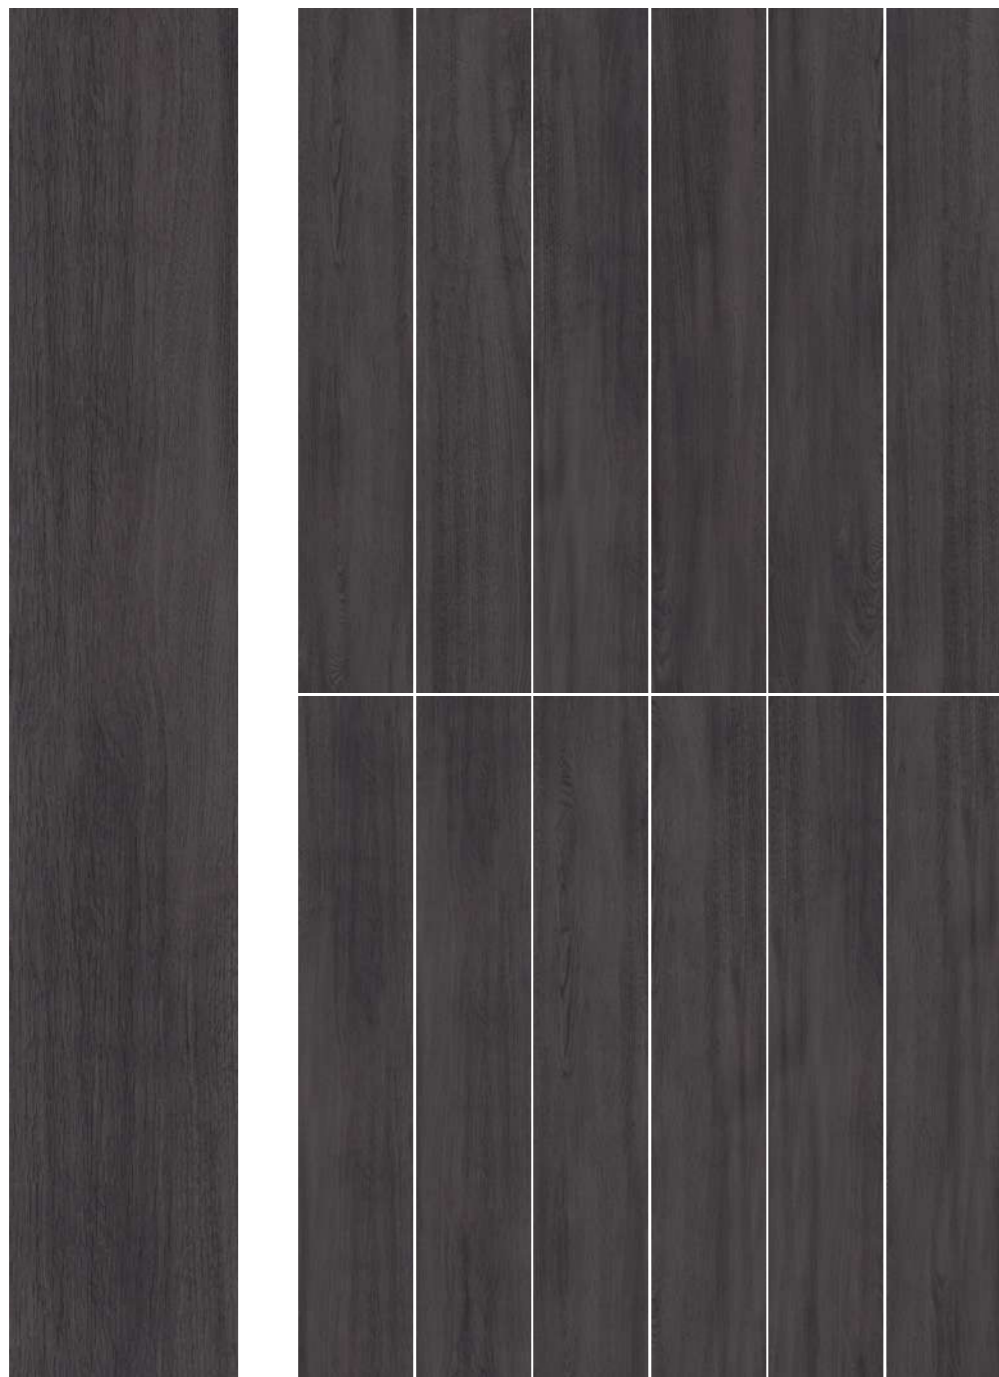

V2
Rectified
Eco MML
Flat



FLOOR: DARK SMOAK5 20x120cm / 8'x48"

TECHNICAL SPECIFICATION MML PORCELAIN (RECTIFIED)


E ≤ 0.5% (Bla, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2	± 0.30% max ± 1.0mm	± 0.25% max ± 1.0mm
Thickness	ISO 10545-2	± 5.00% max ± 0.5mm	± 5.00% max ± 0.5mm
Straightness of Sides	ISO 10545-2	± 0.30% max ± 0.8mm	± 0.25% max ± 0.8mm
Rectangularity	ISO 10545-2	± 0.30% max ± 1.5mm	± 0.30% max ± 1.5mm
Surface Flatness	ISO 10545-2	± 0.40% max ± 1.8mm	± 0.25% max ± 1.8mm
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3	Group Bla, E ≤ 0.5%	≤ 0.5%
Breaking Strength	ISO 10545-4	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4	Min 35 N / mm ²	> 35 N / mm ² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7	Report Abrasion Class	Glazed: Class 2-4 (Depending on Glaze Type)



QUALITY. GUARANTEED.

FOLLOW US ON:



mymml.com



[mmlglobal](#)



[mmlglobal](#)



The above information serves as a general guideline only. Different types of tiles are made to meet different performance requirements. For legal compliance or for specific product technical performance, please request for a confirmation or test report.