

RITZ



QUALITY. GUARANTEED.

THE RITZ OF LUXURY LIVING

Inspired by the glitz and romance of Paris - the City of Love, RITZ collection draws its inspiration from the high fashion romantic vibes of Parisian living. Designed for those who seek the best in life, the soft veins and textures of this elegant marble look represents the pinnacle of luxury living. In five enticing hues of Cream, Avorio and Silver, RITZ captivates with its graceful sophistication.

RITZ



RITZ

COLOURS

FINISHING | POLISHED



SLRIT1 | PXRIT1
CREAM



SLRIT2 | PXRIT2
AVORIO



SLRIT3 | PXRIT3
SILVER

FLOOR: AVORIO **PXRIT2** 60x120cm / 24"x48"



FINISHING | POLISHED



WALL&FLOOR: SILVER **PXRIT3** 60x120cm / 24"x48"


RITZ

V2
Rectified
Eco MML
Flat


FINISHING

S SATIN

P POLISHED

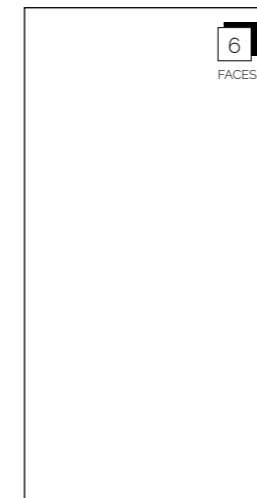

60x120cm
24"x48"




60x60cm
24"x24"



30x60cm
12"x24"

COLOURS

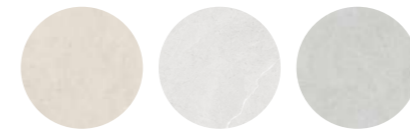

Floor



Wall




Indoor


* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

S SLRIT1 | P PXRIT1 / CREAM

60x120cm 24"x48"

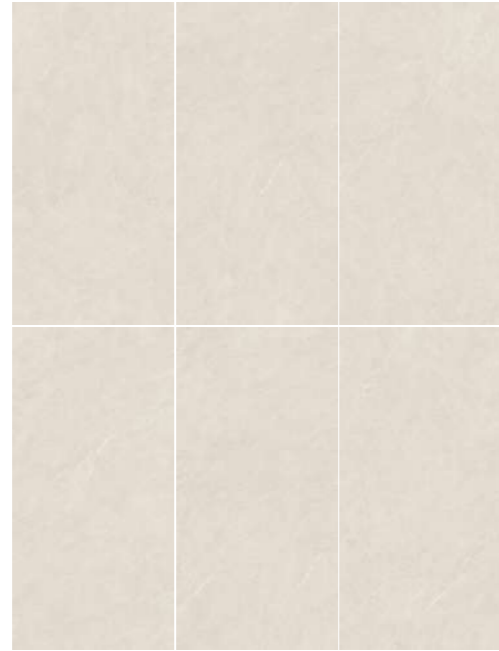

60x60cm 24"x24"

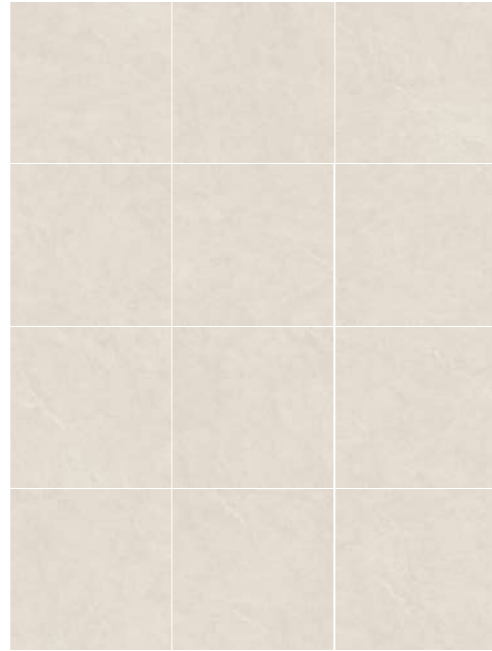

S SLRIT3 | P PXRIT3 / SILVER

60x120cm 24"x48"




60x60cm 24"x24"




S SLRIT2 | P PXRIT2 / AVORIO

60x120cm 24"x48"

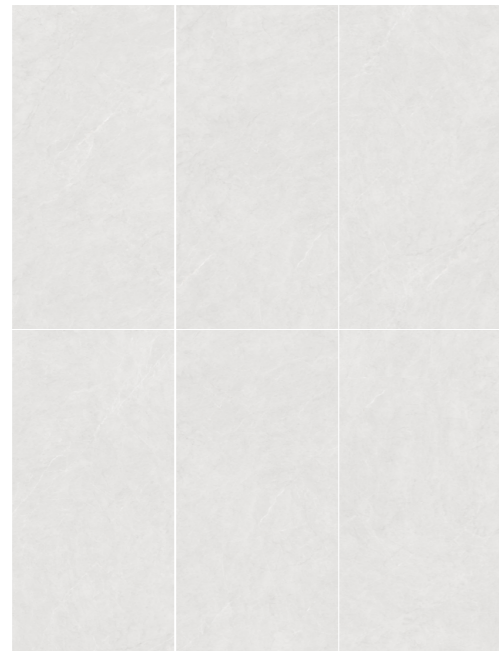

60x60cm 24"x24"

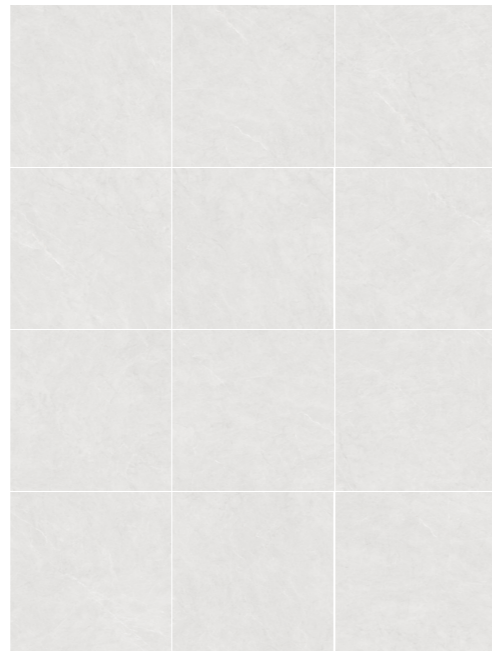

Floor



Wall



Indoor

* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

TECHNICAL SPECIFICATION MML PORCELAIN (RECTIFIED)

E ≤ 0.5% (Bla, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2	± 0.30% max ± 1.0mm	± 0.25% max ± 1.0mm
Thickness	ISO 10545-2	± 5.00% max ± 0.5mm	± 5.00% max ± 0.5mm
Straightness of Sides	ISO 10545-2	± 0.30% max ± 0.8mm	± 0.25% max ± 0.8mm
Rectangularity	ISO 10545-2	± 0.30% max ± 1.5mm	± 0.30% max ± 1.5mm
Surface Flatness	ISO 10545-2	± 0.40% max ± 1.8mm	± 0.25% max ± 1.8mm
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3	Group Bla, E ≤ 0.5%	≤ 0.5%
Breaking Strength	ISO 10545-4	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4	Min 35 N / mm ²	> 35 N / mm ² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7	Report Abrasion Class	Glazed: Class 2-4 (Depending on Glaze Type)



QUALITY. GUARANTEED.

FOLLOW US ON:



mymml.com



[mmlglobal](#)



[mmlglobal](#)



The above information serves as a general guideline only. Different types of tiles are made to meet different performance requirements. For legal compliance or for specific product technical performance, please request for a confirmation or test report.