



BAUHAUS



QUALITY. GUARANTEED.

SIMPLICITY PLUS FUNCTIONALITY

Infusing the design philosophy of "less is more", BAUHAUS embraces practicality as its guiding principle. Every subtle element is meticulously crafted to blend simplicity with style. Its raw textures and neutral colour palette tastefully conveys clean spatial aesthetics, providing a sense of soothing comfort for minimalist, industrial and brutalist interior concepts.

BAUHAUS



BAUHAUS

COLOURS



SMBAU1
DESERT



SMBAU2
SAND

FLOOR: DESERT **SMBAU1** 60x60cm / 24"x24"




WALL: SAND **S MBAU2** 60x120cm / 24"x48"
 FLOOR: SAND **S MBAU2** 60x60cm / 24"x24"


BAUHAUS

V2
 Rectified
 Eco MML
 Structured


FINISHING **NATURAL**

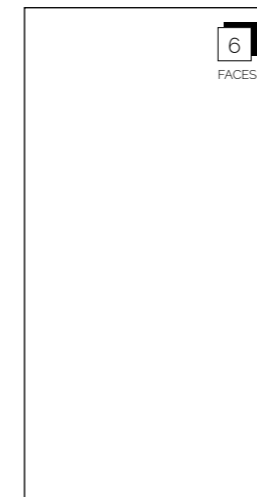

60x120cm
 24"x48"



60x60cm
 24"x24"



30x60cm
 12"x24"

COLOURS




-  Floor
-  Wall
-  Outdoor
-  Indoor


* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

SMBAU1 / DESERT

60x120cm 24"x48"

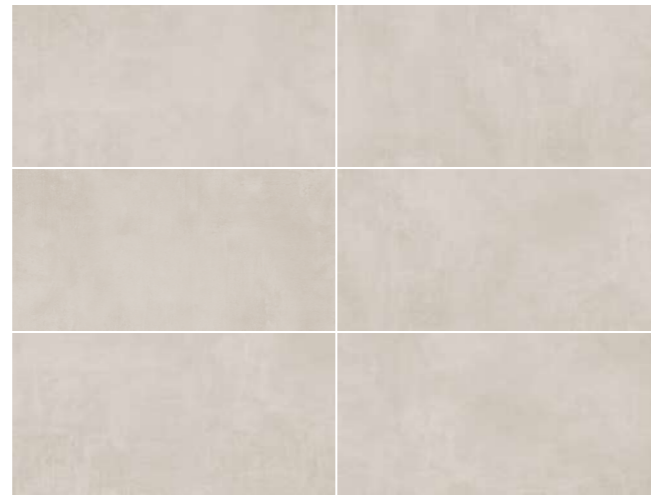


60x60cm 24"x24"

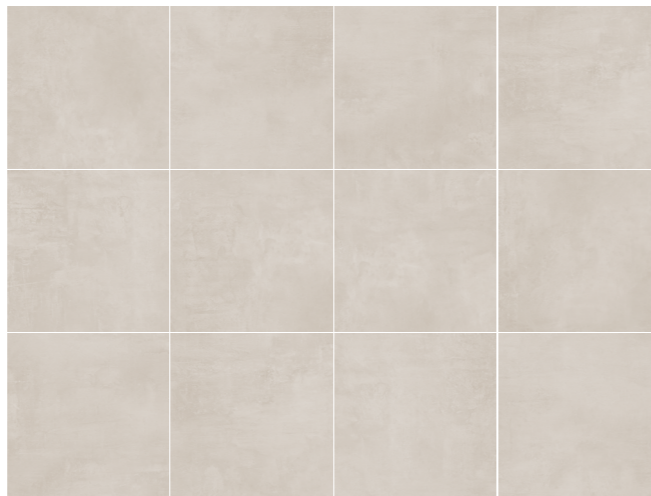


SMBAU2 / SAND

60x120cm 24"x48"

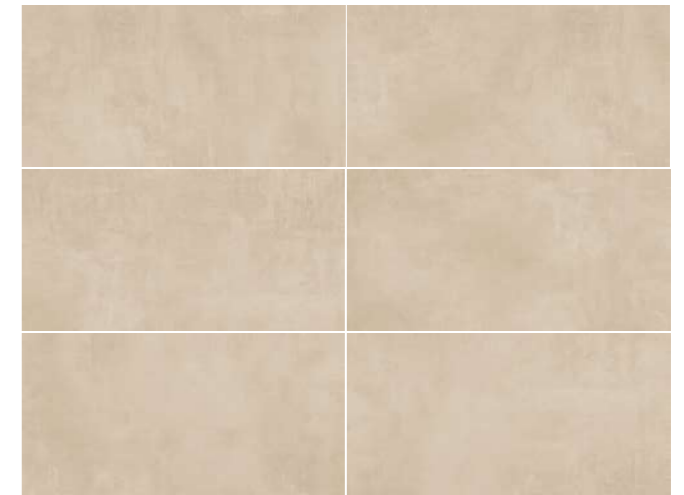

60x60cm 24"x24"

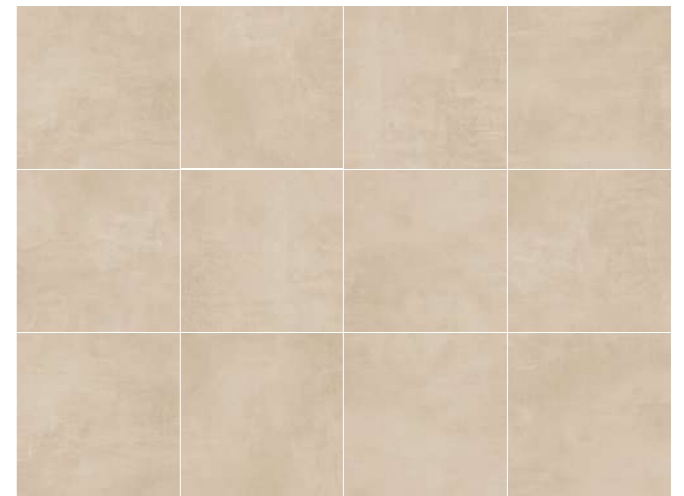

* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

TECHNICAL SPECIFICATION MML PORCELAIN (RECTIFIED)


E ≤ 0.5% (Bla, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
DIMENSIONAL CHARACTERISTICS			
Length & Width	ISO 10545-2	± 0.30% max ± 1.0mm	± 0.25% max ± 1.0mm
Thickness	ISO 10545-2	± 5.00% max ± 0.5mm	± 5.00% max ± 0.5mm
Straightness of Sides	ISO 10545-2	± 0.30% max ± 0.8mm	± 0.25% max ± 0.8mm
Rectangularity	ISO 10545-2	± 0.30% max ± 1.5mm	± 0.30% max ± 1.5mm
Surface Flatness	ISO 10545-2	± 0.40% max ± 1.8mm	± 0.25% max ± 1.8mm
CHEMICAL PROPERTIES			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
PHYSICAL PROPERTIES			
Water Absorption	ISO 10545-3	Group Bla, E ≤ 0.5%	≤ 0.5%
Breaking Strength	ISO 10545-4	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4	Min 35 N / mm ²	> 35 N / mm ² (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7	Report Abrasion Class	Glazed: Class 2-4 (Depending on Glaze Type)



QUALITY. GUARANTEED.

FOLLOW US ON:



mymml.com



[mmlglobal](#)



[mmlglobal](#)



The above information serves as a general guideline only. Different types of tiles are made to meet different performance requirements. For legal compliance or for specific product technical performance, please request for a confirmation or test report.