

# TOUCHSTONE



QUALITY. GUARANTEED.

## A SENSE OF TOUCH

Embracing the allure of nature's magnificence, TOUCHSTONE tastefully carves the authentic textures and meandering cracks of natural stone to create a delightful sensory experience. Combining powerful visual impact with a sense of touch, TOUCHSTONE recreates exquisite stone surfaces in natural organic shades to welcome nature into your spaces.

# TOUCHSTONE



# TOUCHSTONE

COLOURS



FLOOR: ANTRACITE **SMTOU4** 60x120cm / 24"x48"



**SMTOU1**  
IVORY



**SMTOU2**  
SAND



**SMTOU3**  
SILVER



**SMTOU4**  
ANTRACITE



WALL&FLOOR:  
IVORY **SMTOU1** 60x120cm / 24"x48"







# TOUCHSTONE

V2  
Rectified  
Eco MML  
Structured


FINISHING **NATURAL**

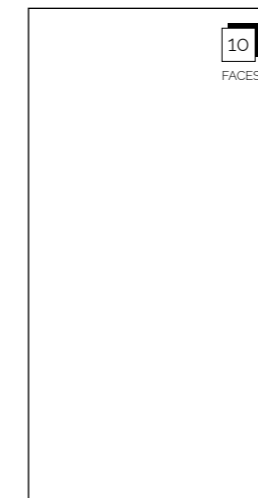

**60x120cm**  
24"x48"



**60x60cm**  
24"x24"



**30x60cm**  
12"x24"

## COLOURS



\* Colours and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

# TOUCHSTONE


60x120cm 24"x48"

V2  
Rectified  
Eco MML  
Structured

**SMTOU1** / IVORY




**SMTOU3** / SILVER

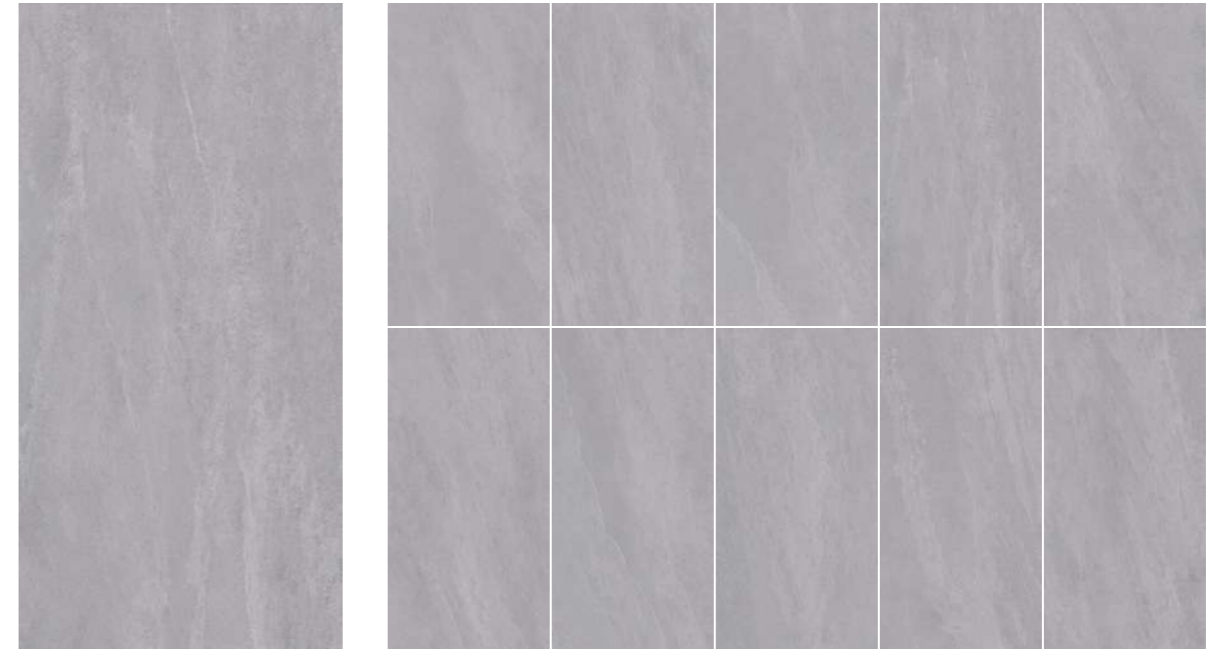

**SMTOU2** / SAND



**SMTOU4** / ANTRACITE

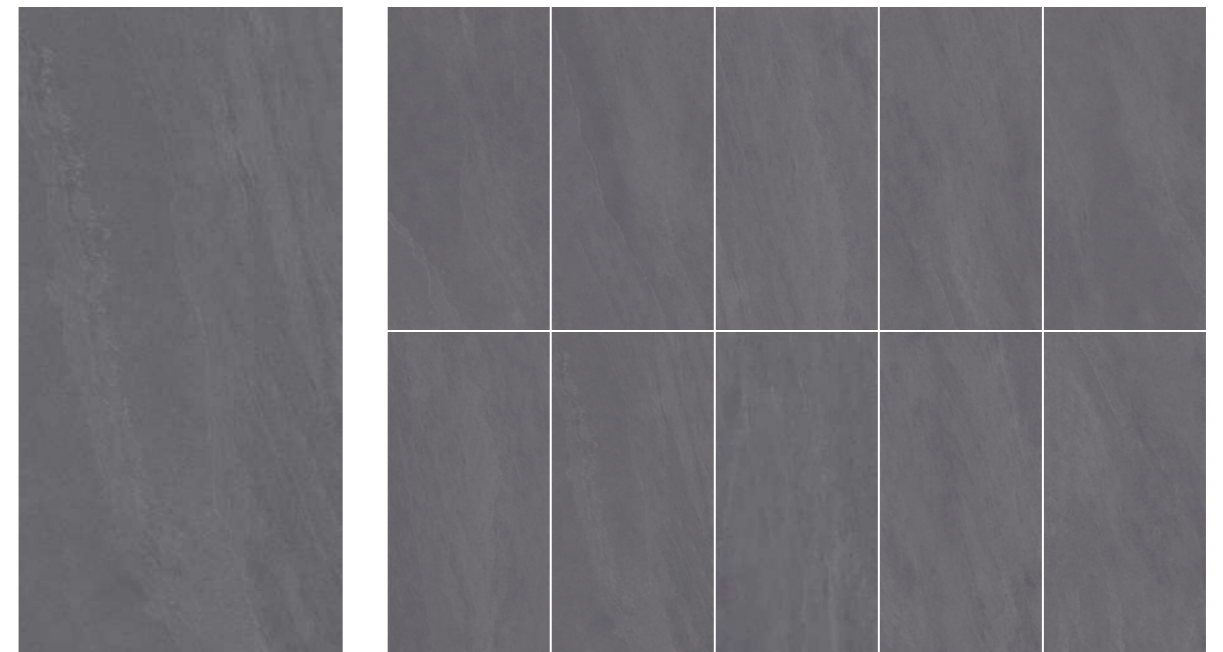

# TECHNICAL SPECIFICATION MML PORCELAIN (RECTIFIED)


E ≤ 0.5% (Bla, ANNEX G)

TECHNICAL FEATURES	STANDARDS	INTERNATIONAL STANDARDS	MML TYPICAL STANDARDS
<b>DIMENSIONAL CHARACTERISTICS</b>			
Length & Width	ISO 10545-2	± 0.30% max ± 1.0mm	± 0.25% max ± 1.0mm
Thickness	ISO 10545-2	± 5.00% max ± 0.5mm	± 5.00% max ± 0.5mm
Straightness of Sides	ISO 10545-2	± 0.30% max ± 0.8mm	± 0.25% max ± 0.8mm
Rectangularity	ISO 10545-2	± 0.30% max ± 1.5mm	± 0.30% max ± 1.5mm
Surface Flatness	ISO 10545-2	± 0.40% max ± 1.8mm	± 0.25% max ± 1.8mm
<b>CHEMICAL PROPERTIES</b>			
Resistance to Household Chemicals & Swimming Pool Salts	ISO 10545-13	Min GB	GB
Resistance to Staining	ISO 10545-14	Min Class 3	Class 3
<b>PHYSICAL PROPERTIES</b>			
Water Absorption	ISO 10545-3	Group Bla, E ≤ 0.5%	≤ 0.5%
Breaking Strength	ISO 10545-4	Min 1300 N	1300 N
Modulus of Rupture	ISO 10545-4	Min 35 N / mm <sup>2</sup>	> 35 N / mm <sup>2</sup> (Depending on Series)
Resistance to Surface Abrasion	ISO 10545-7	Report Abrasion Class	Glazed: Class 2-4 (Depending on Glaze Type)



QUALITY. GUARANTEED.

FOLLOW US ON:



[mymml.com](http://mymml.com)



[mmlglobal](#)



[mmlglobal](#)



The above information serves as a general guideline only. Different types of tiles are made to meet different performance requirements. For legal compliance or for specific product technical performance, please request for a confirmation or test report.